

SPHERE LOCK™ – TYPE B

VIEW ONLINE



SCAN FOR INFO

or


visit
KOA.link/Sphere-Lock_Type-B-2



SLB-PCM Series

Male Ball X Polycrimp HDPE

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
SLB-PCM400	4	125	5.76	1
SLB-PCM600	6	125	12.52	1
SLB-PCM800	8	125	19.43	1

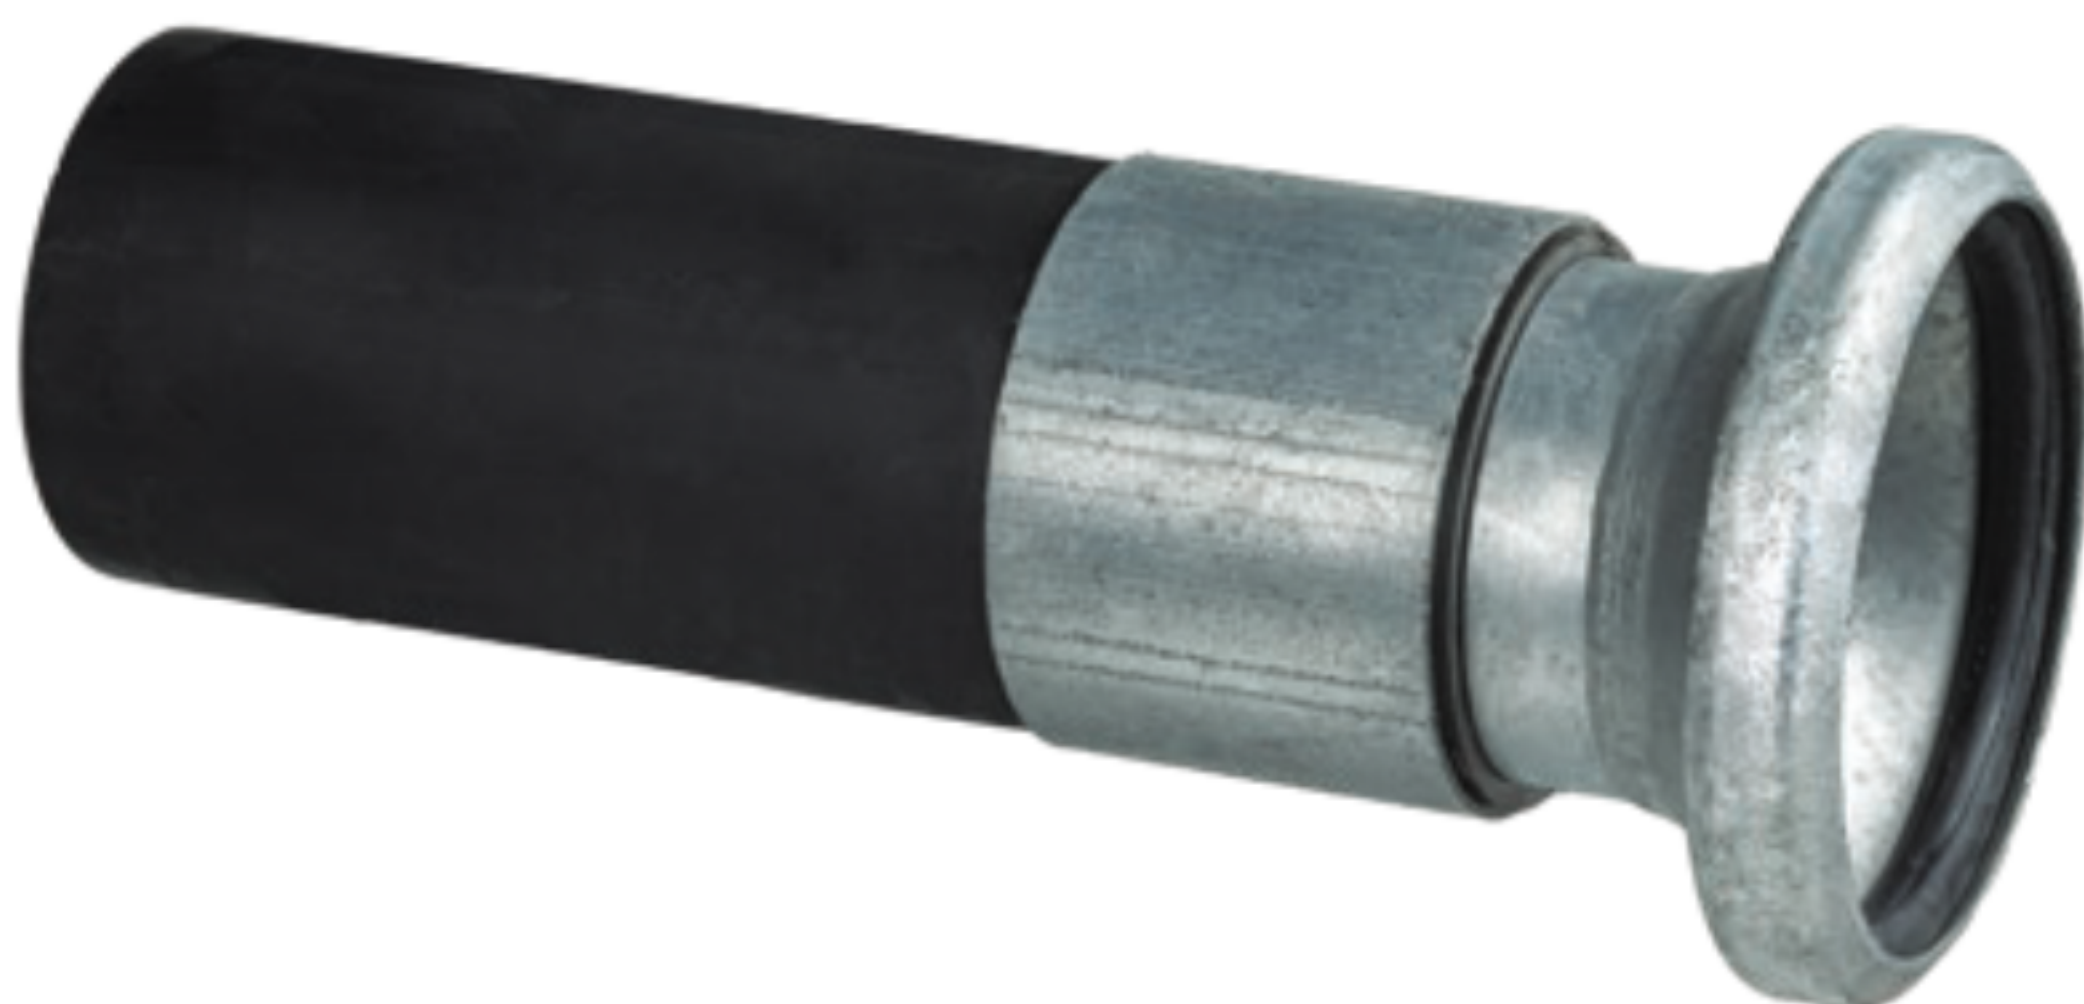

SLB-PCF Series

Female Socket X Polycrimp HDPE
(Includes Buna Gasket)

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
SLB-PCF400	4	125	6.55	1
SLB-PCF600	6	125	11.70	1
SLB-PCF800	8	125	19.50	1



SLB-LR Series

Locking Lever Ring

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
SLB-LR200	2	290	1.01	1
SLB-LR300	3	290	2.31	1
SLB-LR400	4	217	4.45	1
SLB-LR600	6	175	9.30	1
SLB-LR800	8	175	13.49	1



SLB-LR Series*

Locking Ring

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
SLB-LR1000	10	175	24.27	1
SLB-LR1200	12	175	35.05	1

* Requires Lever Assist Bar (Type B) to couple (SLB-LV) page 152.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.