


CRN

CRN Series (Zinc Plated Steel)

Male NPT x Hose Shank

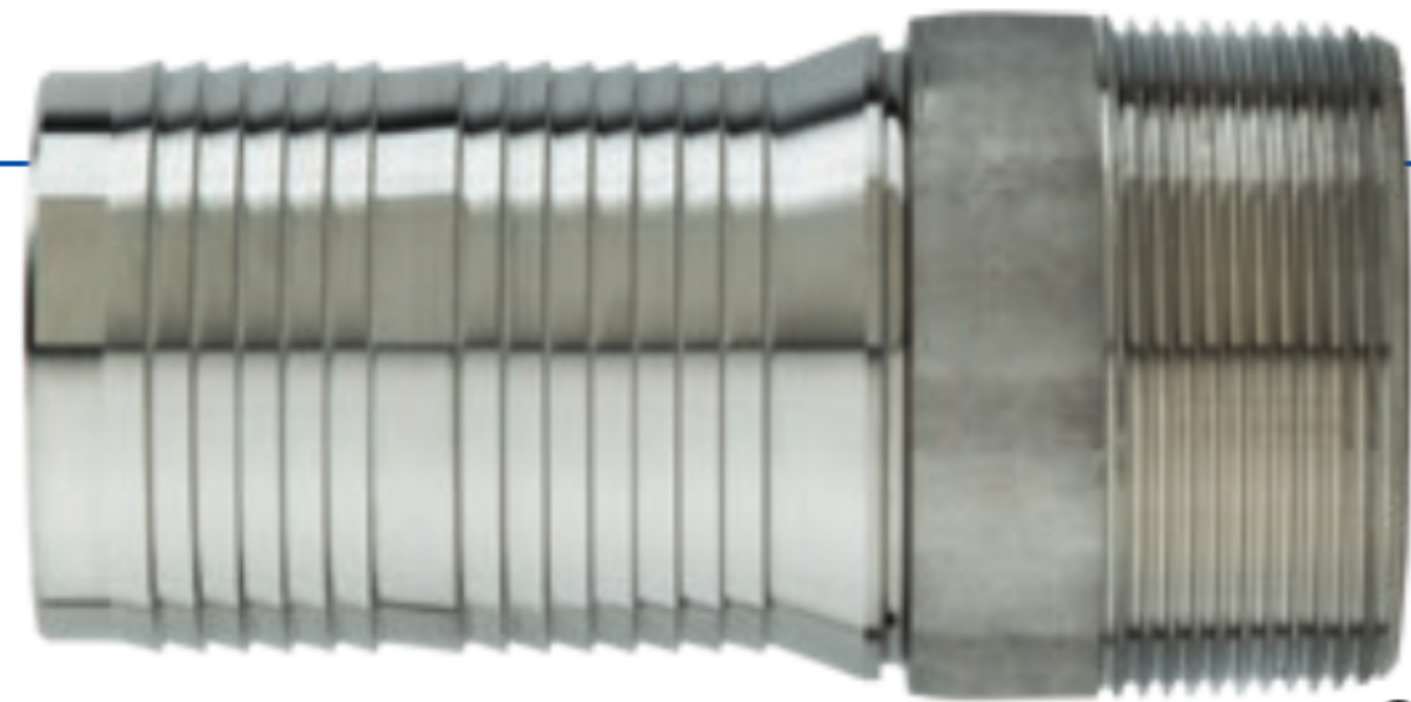

CRN-SS

CRN-SS Series (316 Stainless Steel)

Male NPT x Hose Shank

VIEW ONLINE










SCAN FOR INFO
or visit
KOA.link/CRN







FEATURES AND ADVANTAGES

- Versatile hose connectors designed to connect hose and pipes of the same thread size.
- Tri-Couple design available in all sizes for each item.
- Frequently used in low pressure suction and discharge applications, and can be connected to many different types of strainers and couplings.
- Multi-serrated barb design allows for secure hose grip when properly clamped or crimped.

MATERIAL SPECIFICATIONS

- CRN Series Complies with ASTM A53 Grade B welded pipe.
- CRN-SS Series Complies with ASTM A276 grade 316 welded pipe.

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
 CRN100	1	250	0.37	80
 CRN150	1 1/2	250	0.77	60
 CRN200	2	250	1.18	50
 CRN250	2 1/2	150	1.82	40
 CRN300	3	150	2.28	36
 CRN400	4	150	3.35	32
 CRN600	6	75	12.40	12

Part Number	Size (in)	PSI Rating at 70°F	Weight Each (lbs)	Standard Carton
 CRN-SS100	1	250	0.40	80
 CRN-SS150	1 1/2	250	0.80	60
 CRN-SS200	2	250	1.25	50
 CRN-SS250	2 1/2	150	1.91	40
 CRN-SS300	3	150	2.35	36
 CRN-SS400	4	150	3.45	32

 Designates Tri-Couple fitting

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.