





VIEW ONLINE



SCAN FOR INFO or visit **KOA.link/AL-LDHC**

Grooved End Couplings

AL-LDHC Series

Large Diameter Hose Coupling (designed for Tipsa layflat hoses)


FEATURES AND ADVANTAGES

- Lightweight aluminum with abrasion resistant Don't risk a leak! anodized hard coating.
- Multiple collar segments evenly distribute pressure on the hose for even sealing.
- Locking Lip[™] provides better coupling retention when compared with other designs.
- For use with large diameter layflat hoses.

MATERIAL SPECIFICATIONS

Hard coat anodized aluminum.

Unique Locking Lip™ design increases coupling retention.

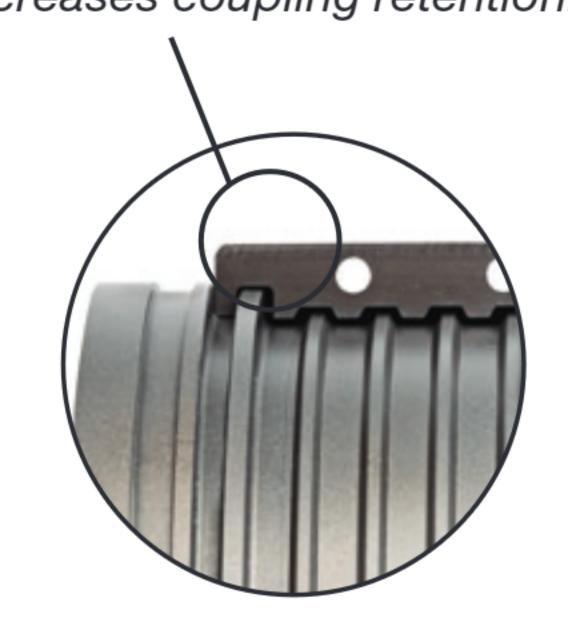

Part Number	Size (in)	Working Pressure (psi) at 68°F	Burst Pressure (psi) at 68°F	Weight Each (lbs)	Standard Carton
AL-LDHC1000	10	200	600	41.20	1
AL-LDHC1200	12	200	600	57.30	1



VIEW ONLINE



SCAN FOR INFO or visit ■ KOA.link/DHM

DHM-AL / DHM-SS Series

Ducting Hose Mender for URE-CL, URE-BK, UREH-CL, UREH-BK, VID-CL, and TMOD Series Hoses

Part Number	Material	Size (in)	Weight Each (lbs)
DHM-AL600		6	0.28
DHM-AL800	Aluminum	8	0.38
DHM-AL1000		10	0.49
DHM-AL1200		12	0.60
DHM-SS600		6	0.40
DHM-SS800	Stainless Steel	8	0.54
DHM-SS1000		10	0.68
DHM-SS1200		12	0.76

NOTE: Ducting menders to be used in conjunction with two bridge clamps.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

