




DD90-AL Series
(Aluminum Part D x D 90° Elbow)
Female Coupler X Female Coupler

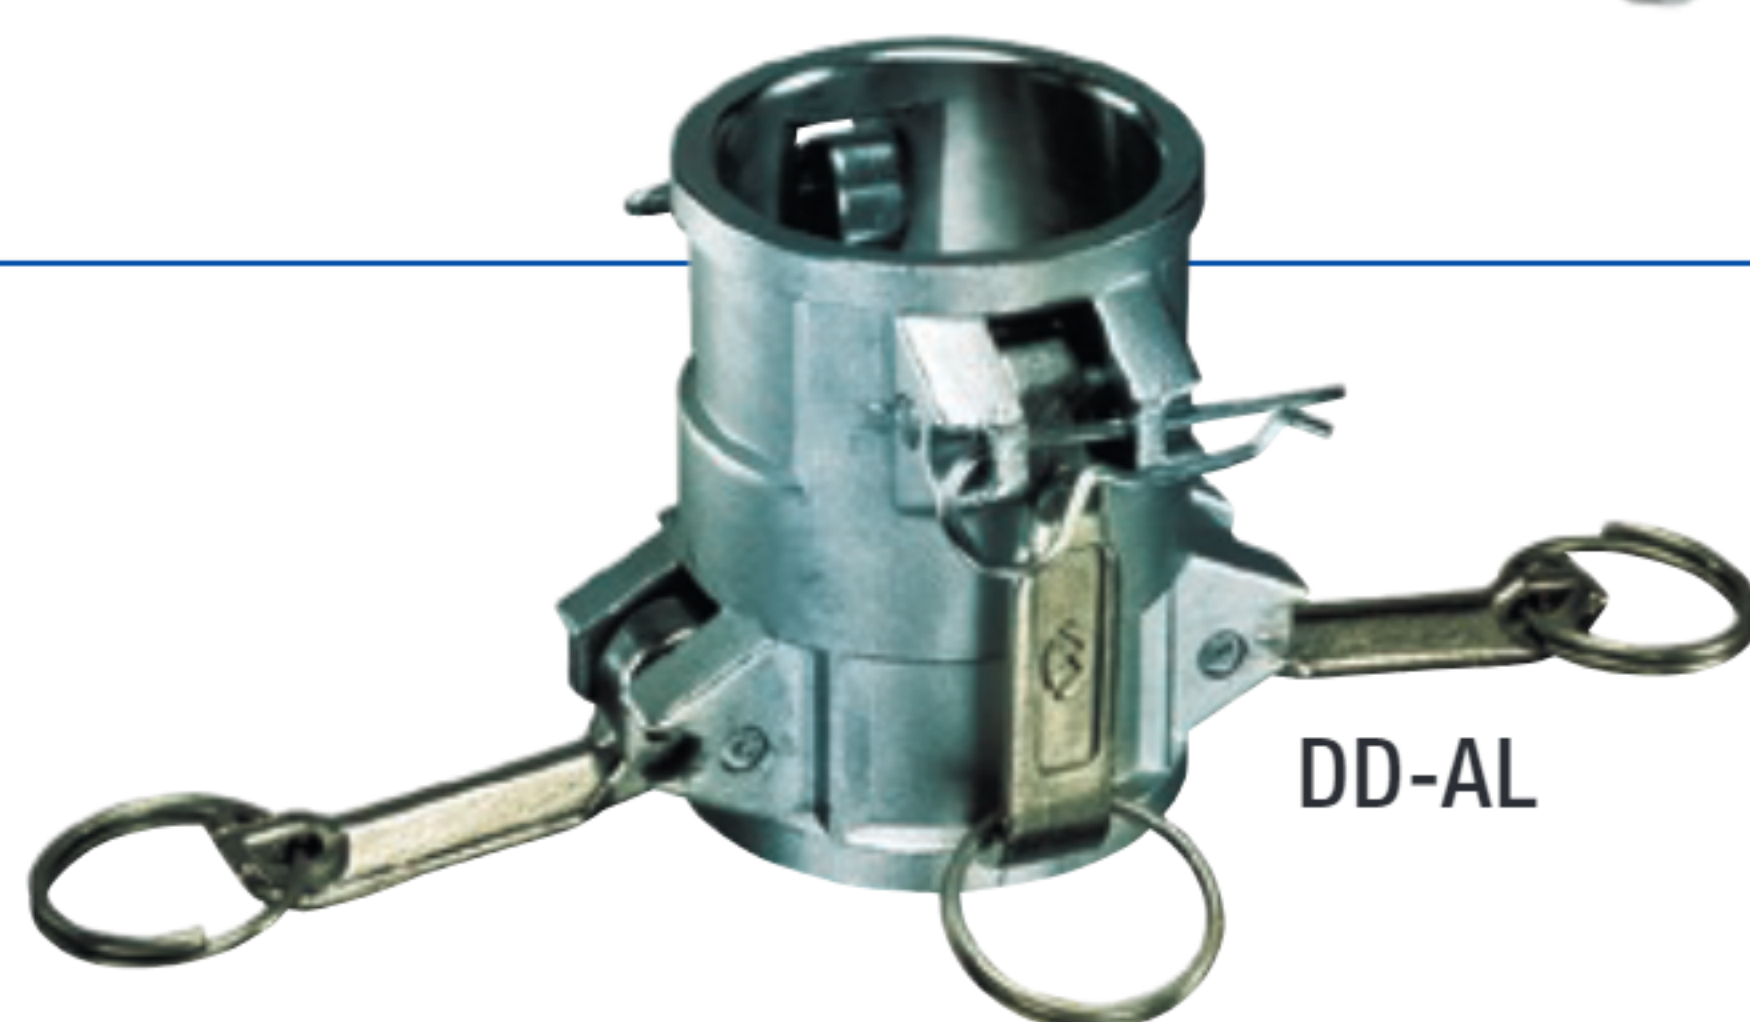

DD-AL Series *(Aluminum Part D x D)*
Female Coupler X Female Coupler

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/DD-AL

GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

FEATURES AND ADVANTAGES

- High quality design made to withstand rigorous applications found in industrial markets.
- Aluminum alloy specially designed for high tensile strength and impact resistance.
- Supplied with forged brass handles which results in less wear on connecting parts.

MATERIAL SPECIFICATIONS

- ASTM aluminum alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- Forged brass handles.
- Zinc-plated carbon steel handle pins, pull rings and safety clips.
- Buna-N gasket included.

Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
DD90-AL200	2	250	B85 Grade 383	2.20	16
DD90-AL300	3	150	B85 Grade 383	3.50	10
DD90-AL400	4	150	B85 Grade 383	5.10	5
DD90-AL600	6	75	B85 Grade 383	10.50	2

Part Number	Female Coupler Size (in)	Female Coupler Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
DD-AL150	1 1/2	1 1/2	250	B85 Grade 383	4.35	9
DD-AL200	2	2	250	B85 Grade 383	1.43	12
DD-AL2030	2	3	150	B85 Grade 383	4.35	9
DD-AL300	3	3	150	B85 Grade 383	2.40	6
DD-AL3040	3	4	150	B85 Grade 383	5.90	12
DD-AL400	4	4	150	B85 Grade 383	3.90	5
DD-AL600	6	6	75	B85 Grade 383	7.32	4

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.