




KLOC-SS-C Series
(316 Stainless Part C)
Female Coupler X Hose Shank

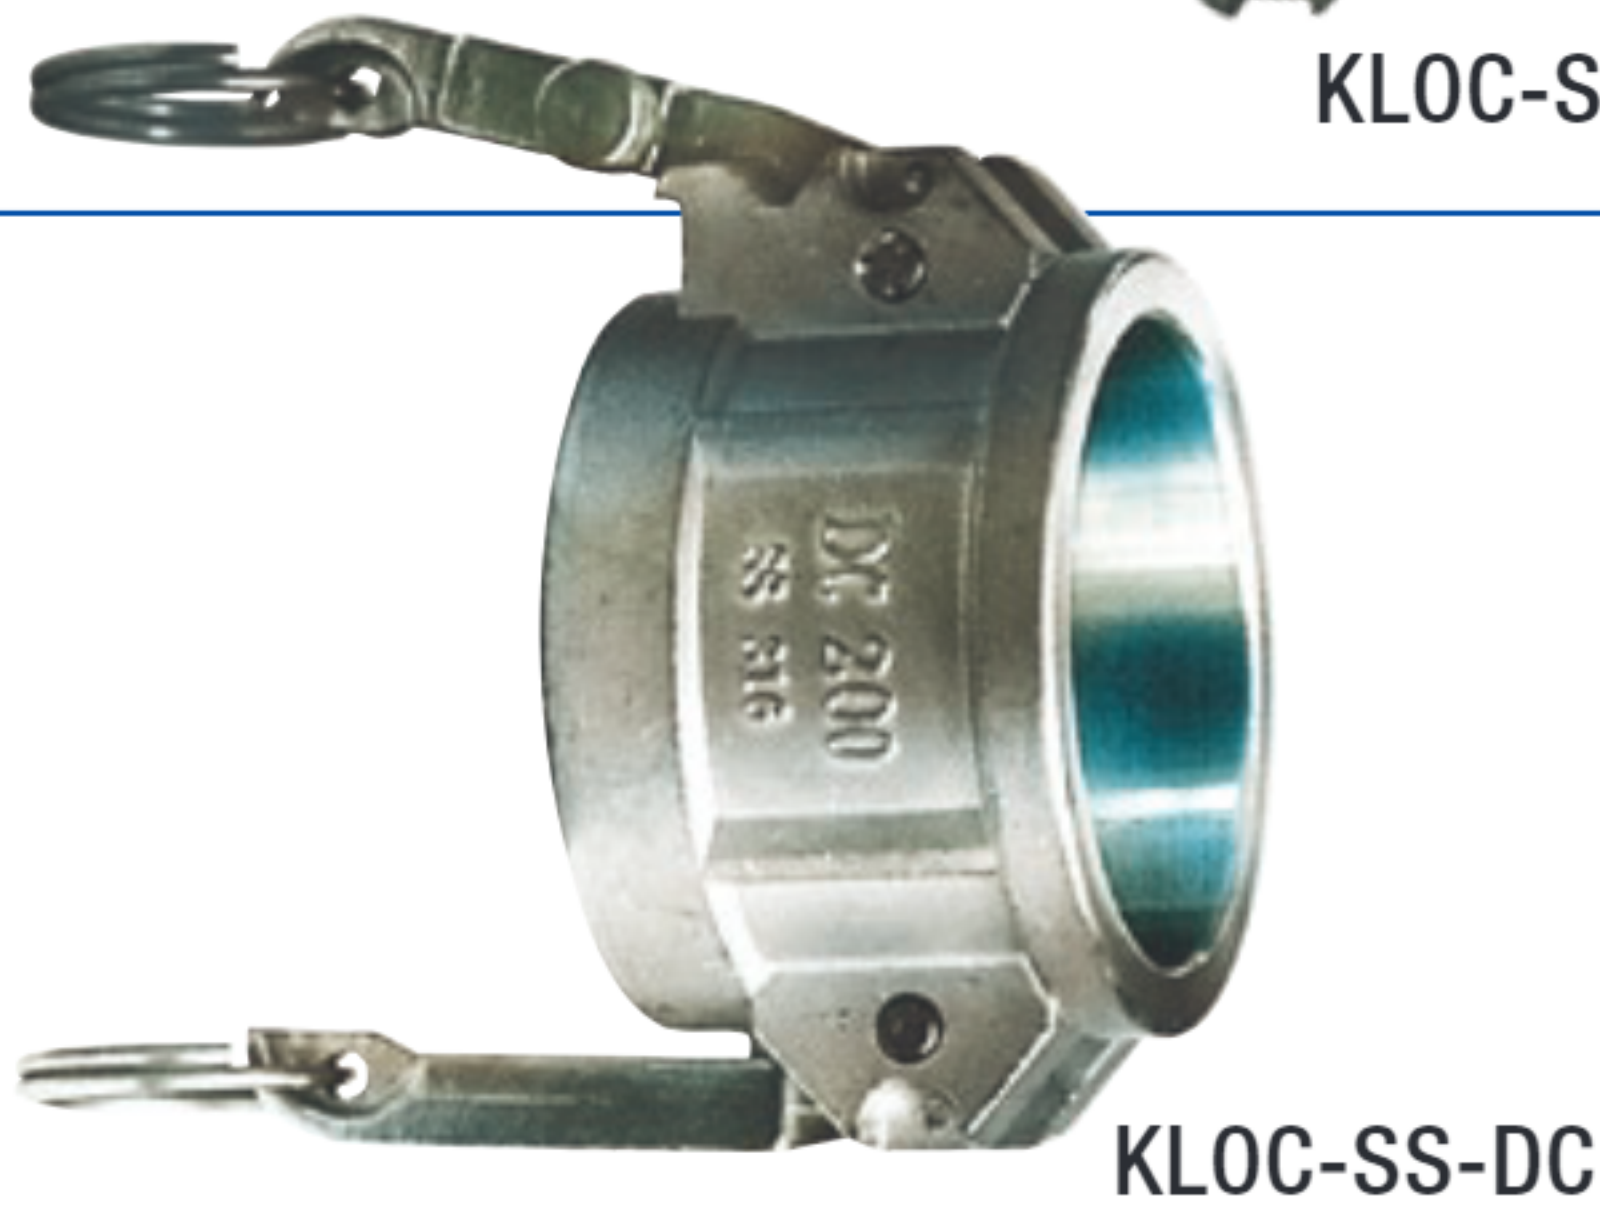

KLOC-SS-DC Series
(316 Stainless Part DC)
Dust Cap

GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

FEATURES AND ADVANTAGES

- High quality design made for use in petroleum markets with bottom loading applications.
- Stainless steel alloy is analyzed on every melt, and specifically designed for high tensile strength and rigidity.
- Self-Locking handle provides maximum security and safety when connecting with male parts.

MATERIAL SPECIFICATIONS

- ASTM stainless steel alloy, specially designed for high tensile strength and impact resistance.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- 304 stainless steel handles, handle pins, pull rings, and safety clips.
- Buna-N gasket included.

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/KLOC1

Part Number	Coupler Size (in)	Shank Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
KLOC-SS-C150	1 1/2	1 1/2	250	A666/316	1.87	15
KLOC-SS-C200	2	2	250	A666/316	2.80	10
KLOC-SS-C300	3	3	150	A666/316	5.22	5

Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
KLOC-SS-DC200	2	250	A666/316	1.89	18
KLOC-SS-DC300	3	150	A666/316	3.33	8

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.