


## Features and Advantages



- **Quadra-Lock Housing** – Four-piece, quadra-lock housing design: added saddle eliminates risk of seam separation, virtually eliminating housing "lift and twist".
- **Evenly Distributed Radial Pressure** – Quality controlled to military standard specifications for even distribution of sealing pressure. Eliminates leakage caused by uneven housings and provides higher sealing pressure with lower applied torque.
- **Arched, Perforated Slots** – Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- **Stainless Steel Band** – 300 series stainless steel band provides durability and superior corrosion resistance.
- **Heavy Duty Stainless Steel Band (WGC-CSHD and WGC-SSHD only)** – 300 Series stainless steel band provides durability and superior corrosion resistance. Wider than standard clamps for greater strength.
- **Hex Screw** - Sharply defined hex angles for better gripping power. More threads per screw results in increased torque strength.
- **Meets Industry Standards** – Clamps are SAE J1508 Type F and RoHS compliant.
- **Torque Rating** – Suggested installation torque of:
  - 25-37 inch pounds (WGC-CS and WGC-CSHD)
  - 30-45 inch pounds (WGC-SS and WGC-SSHD)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

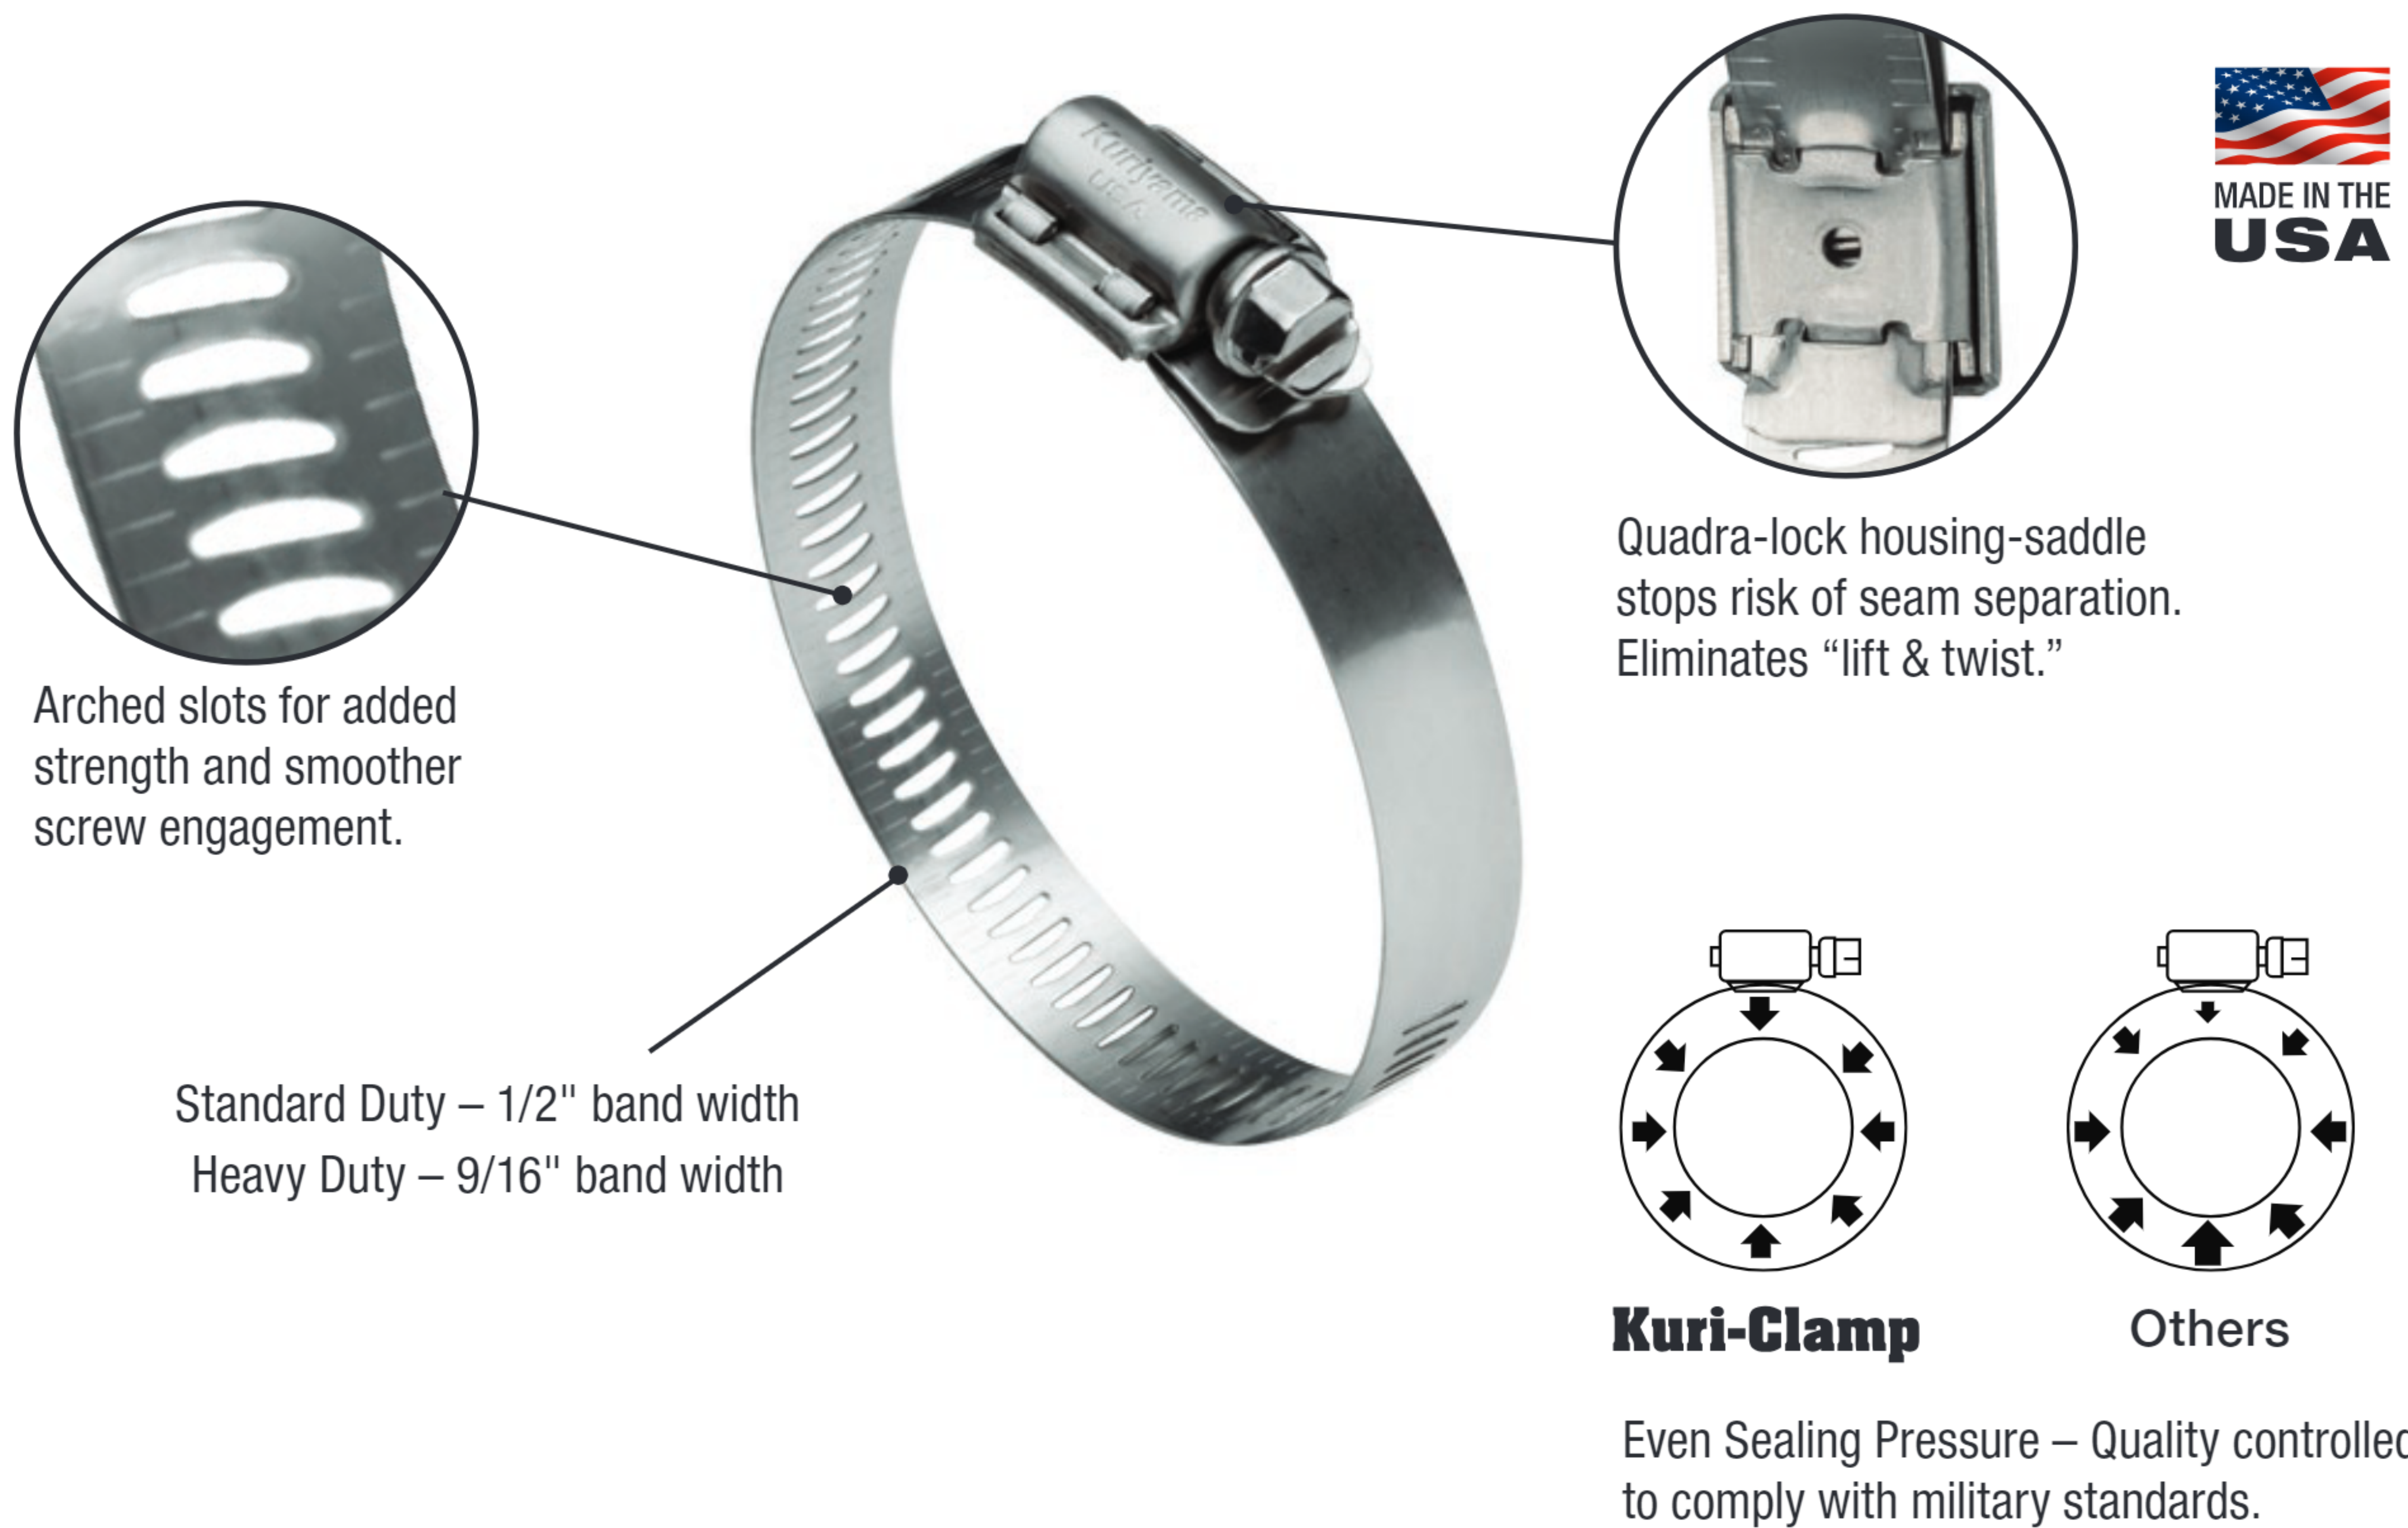

## WGC-CS Series (Stainless Steel & Plated Carbon Steel)

### Standard Duty Worm Gear Clamp

#### GENERAL APPLICATIONS

- Automotive
- Industrial
- General purpose

#### CONSTRUCTION

Four-piece construction consisting of a 1/2" wide, 300 series stainless steel band; plated carbon steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

#### VIEW ONLINE



SCAN FOR INFO

or visit

[KOA.link/WGC-CS](https://KOA.link/WGC-CS)

Part Number	Size Range (in)	Band Width (in)	Torque Rating (in/lbs)	Weight Per Box (lbs)	Pieces per Box*
WGC-CS06	7/16 - 25/32	1/2	25-37	0.60	10
WGC-CS08	1/2 - 29/32	1/2	25-37	0.60	10
WGC-CS10	9/16 - 1 1/16	1/2	25-37	0.60	10
WGC-CS12	11/16 - 1 1/4	1/2	25-37	0.60	10
WGC-CS16	13/16 - 1 1/2	1/2	25-37	0.70	10
WGC-CS20	13/16 - 1 3/4	1/2	25-37	0.70	10
WGC-CS24	1 1/16 - 2	1/2	25-37	0.80	10
WGC-CS28	1 5/16 - 2 1/4	1/2	25-37	0.80	10
WGC-CS32	1 9/16 - 2 1/2	1/2	25-37	0.80	10
WGC-CS36	1 13/16 - 2 3/4	1/2	25-37	0.90	10
WGC-CS40	2 1/16 - 3	1/2	25-37	0.90	10
WGC-CS44	2 5/16 - 3 1/4	1/2	25-37	0.90	10
WGC-CS48	2 9/16 - 3 1/2	1/2	25-37	1.00	10
WGC-CS52	2 13/16 - 3 3/4	1/2	25-37	1.10	10
WGC-CS56	3 1/16 - 4	1/2	25-37	1.10	10
WGC-CS60	3 5/16 - 4 1/4	1/2	25-37	1.20	10
WGC-CS64	3 9/16 - 4 1/2	1/2	25-37	1.20	10
WGC-CS72	1 7/8 - 5	1/2	25-37	1.30	10
WGC-CS80	2 1/2 - 5 1/2	1/2	25-37	1.40	10
WGC-CS88	3 1/8 - 6	1/2	25-37	1.40	10
WGC-CS96	3 5/8 - 6 1/2	1/2	25-37	1.50	10
WGC-CS104	4 1/8 - 7	1/2	25-37	1.50	10

\* Clamps only sold in box quantities

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.