


Features and Advantages

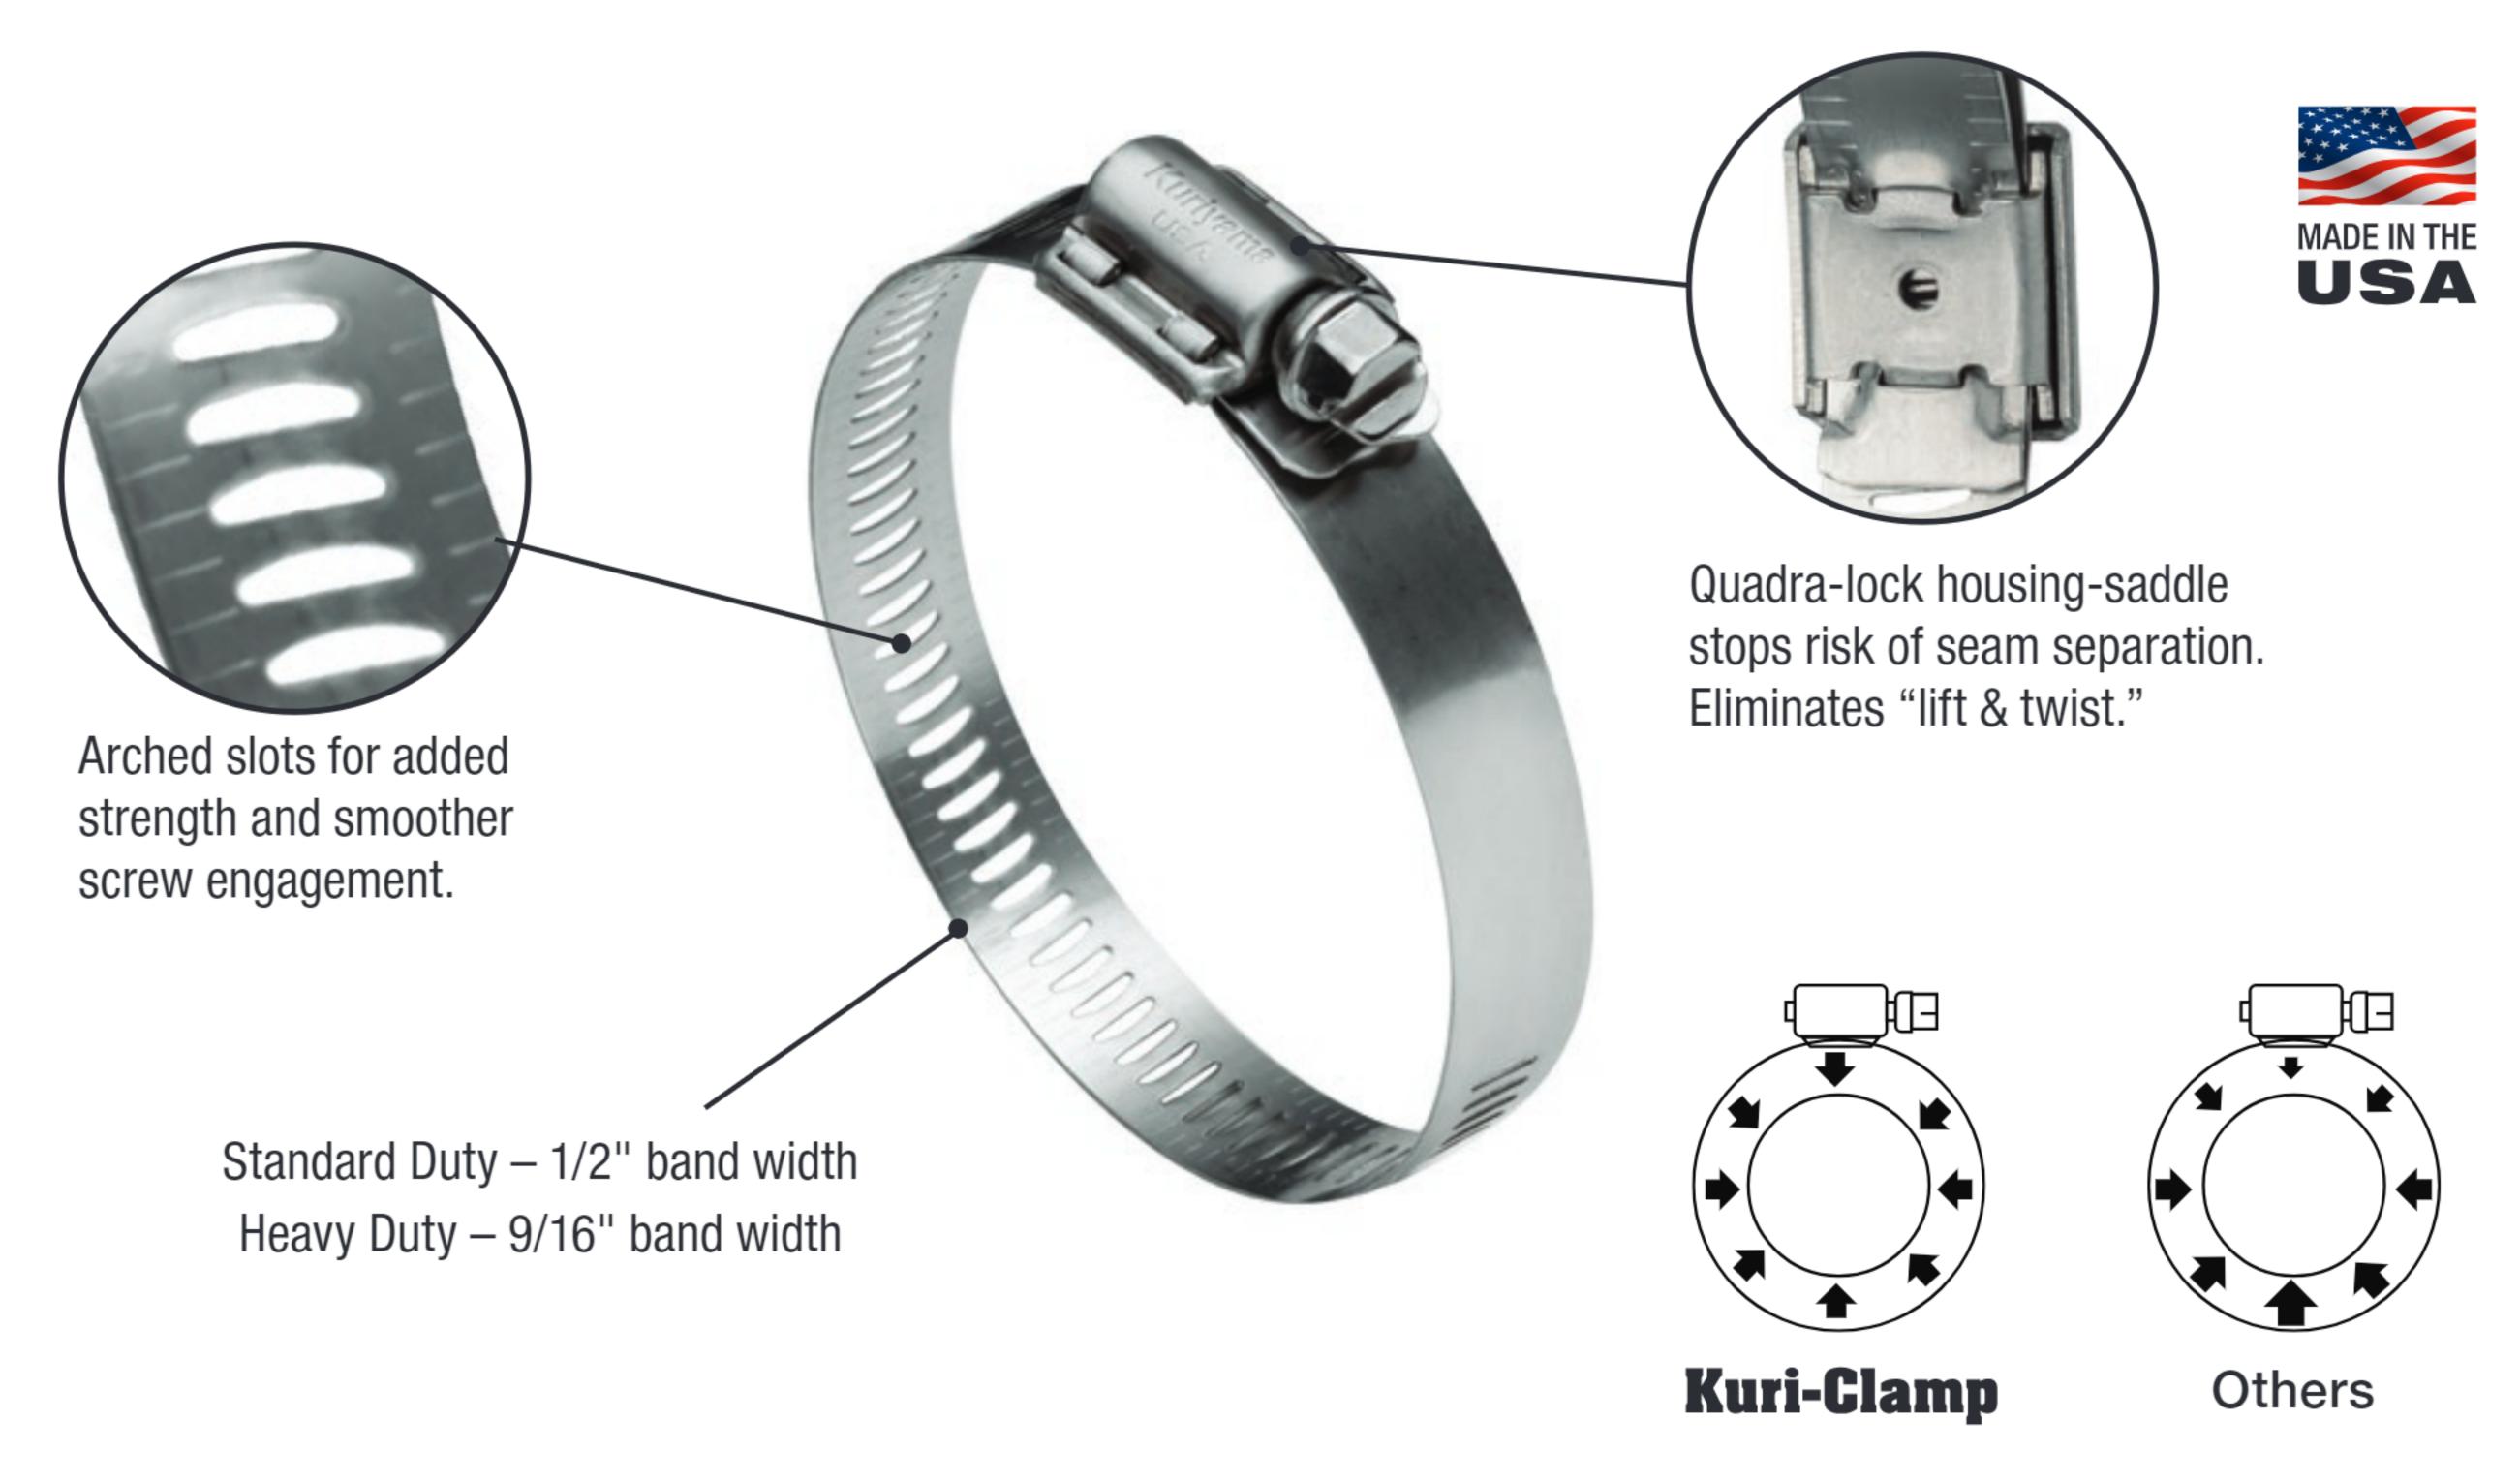

Even Sealing Pressure – Quality controlled to comply with military standards.

- Quadra-Lock Housing Four-piece, quadra-lock housing design: added saddle eliminates risk of seam separation, virtually eliminating housing "lift and twist".
- Evenly Distributed Radial Pressure Quality controlled to military standard specifications for even distribution of sealing pressure. Eliminates leakage caused by uneven housings and provides higher sealing pressure with lower applied torque.
- Arched, Perforated Slots Provides for more overall steel between perforations for added band strength and allows for smoother engagement.
- Stainless Steel Band 300 series stainless steel band provides durability and superior corrosion resistance.

- Heavy Duty Stainless Steel Band (WGC-CSHD and WGC-SSHD only) – 300 Series stainless steel band provides durability and superior corrosion resistance.
 Wider than standard clamps for greater strength.
- Hex Screw Sharply defined hex angles for better gripping power. More threads per screw results in increased torque strength.
- Meets Industry Standards Clamps are SAE J1508
 Type F and RoHS compliant.
- Torque Rating Suggested installation torque of:
 25-37 inch pounds (WGC-CS and WGC-CSHD)
 - 30-45 inch pounds (WGC-SS and WGC-SSHD)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



Hose Clamps Worm Gear Clamps





WGC-SSHD Series (Stainless Steel)

Heavy Duty Worm Gear Clamp

GENERAL APPLICATIONS

- Automotive
- Industrial

CONSTRUCTION

Four-piece construction consisting of a 9/16" wide, 300 series stainless steel band; stainless steel hex screw with 5/16" head and two-piece, 300 series stainless steel housing.

VIEW ONLINE -



SCAN FOR INFO
or visit
KOA.link/
WGC-SSHD

Part Number	Size Range	Band Width	Torque Rating	Weight Per Box	Pieces
	(in)	(in)	(in/lbs)	(lbs)	per Box*
WGC-SSHD06	7/16 - 25/32	9/16	30-45	0.60	10
WGC-SSHD08	1/2 - 29/32	9/16	30-45	0.60	10
WGC-SSHD10	9/16 - 1 1/16	9/16	30-45	0.60	10
WGC-SSHD12	11/16 - 1 1/4	9/16	30-45	0.60	10
WGC-SSHD16	13/16 - 1 1/2	9/16	30-45	0.70	10
WGC-SSHD20	13/16 - 1 3/4	9/16	30-45	0.70	10
WGC-SSHD24	1 1/16 - 2	9/16	30-45	0.80	10
WGC-SSHD28	1 5/16 - 2 1/4	9/16	30-45	0.80	10
WGC-SSHD32	1 9/16 - 2 1/2	9/16	30-45	0.80	10
WGC-SSHD36	1 13/16 - 2 3/4	9/16	30-45	0.90	10
WGC-SSHD40	2 1/16 - 3	9/16	30-45	0.90	10
WGC-SSHD44	2 5/16 - 3 1/4	9/16	30-45	0.90	10
WGC-SSHD48	2 9/16 - 3 1/2	9/16	30-45	1.00	10
WGC-SSHD52	2 13/16 - 3 3/4	9/16	30-45	1.10	10
WGC-SSHD56	3 1/16 - 4	9/16	30-45	1.10	10
WGC-SSHD60	3 5/16 - 4 1/4	9/16	30-45	1.20	10
WGC-SSHD64	3 9/16 - 4 1/2	9/16	30-45	1.20	10
WGC-SSHD72	1 7/8 - 5	9/16	30-45	1.30	10
WGC-SSHD80	2 1/2 - 5 1/2	9/16	30-45	1.40	10
WGC-SSHD88	3 1/8 - 6	9/16	30-45	1.40	10
WGC-SSHD96	3 5/8 - 6 1/2	9/16	30-45	1.50	10
WGC-SSHD104	4 1/8 - 7	9/16	30-45	1.50	10
WGC-SSHD128	5 5/8 - 8 1/2	9/16	30-45	1.60	10
WGC-SSHD152	7 1/8 - 10	9/16	30-45	1.70	10
WGC-SSHD188	9 3/8 - 12 1/4	9/16	30-45	1.90	10

^{*} Clamps only sold in box quantities

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

