

## KCS-TF3/PI-230/3

Hose Capacity (in)		Motor Strength (HP)
1 – 2 Wire	3	<b>7.5</b>
4 SP / 6 SP	2 1/2 / 2	
Industrial	2 1/2	
Max opening (mm)	100	

Cutter Size	
L x W x H (in)	40.4 x 27.6 x 45.3
Weight (lbs)	530
Blade Diameter (mm)	400

Part Number	Motor Info
<b>KCS-TF3/PI-230/3</b>	7.5 HP (230 V) 3 PH




**Description:** A stand alone unit ideal for cutting 2" six spiral hydraulic hose. The blade is recessed inside the base for additional safety. Uses 100 PSI pneumatic input control.

Suggested for use with KC3-H135 series crimpers.


### Included Accessories:



Enclosed Blade Chamber

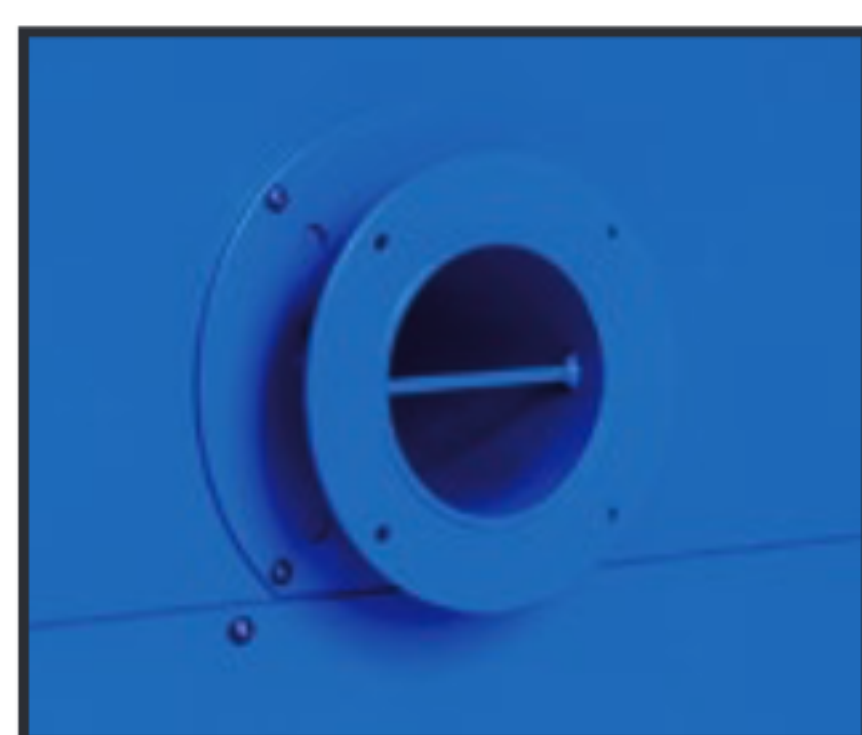

Ventilation Port\*

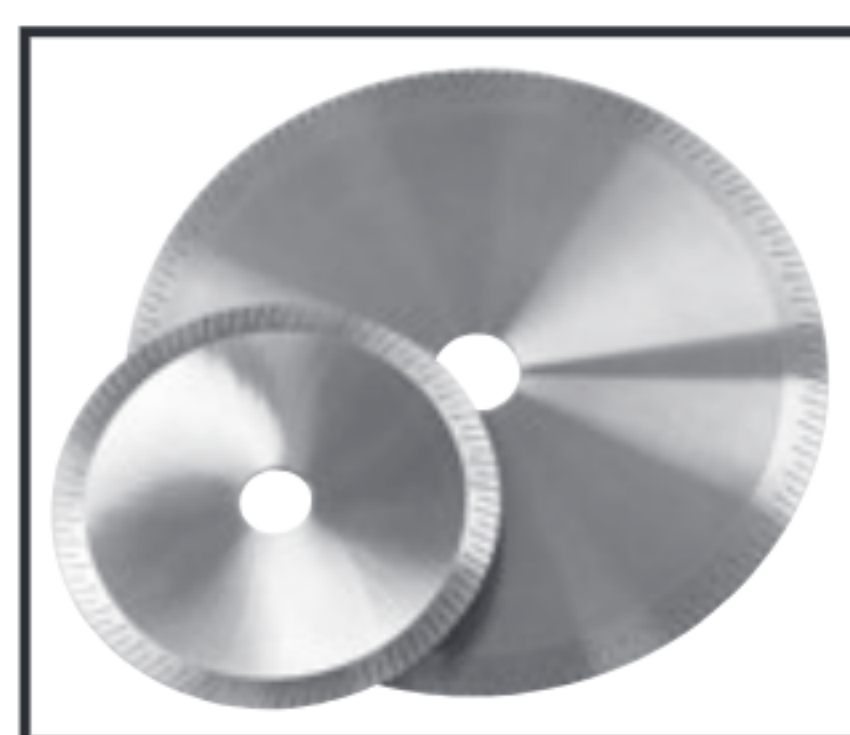


Serrated Blade†  
BLADE-SER400


\* Separate suction device required for fume extraction

† CAUTION: Not for use with hoses containing steel, helical reinforcement.

### Optional Accessories:

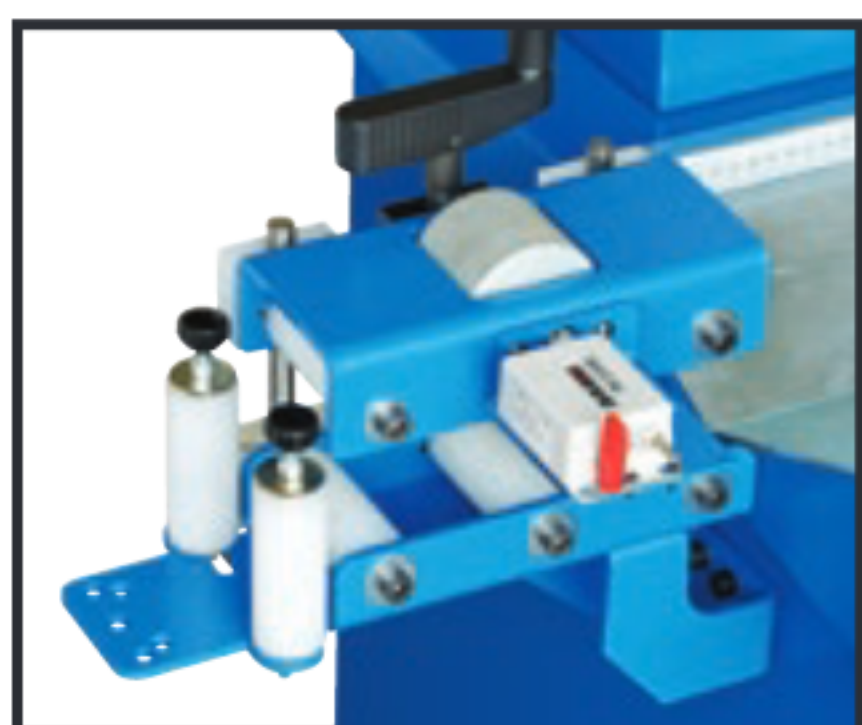


Centering & Measuring Device  
CENTER-KCS

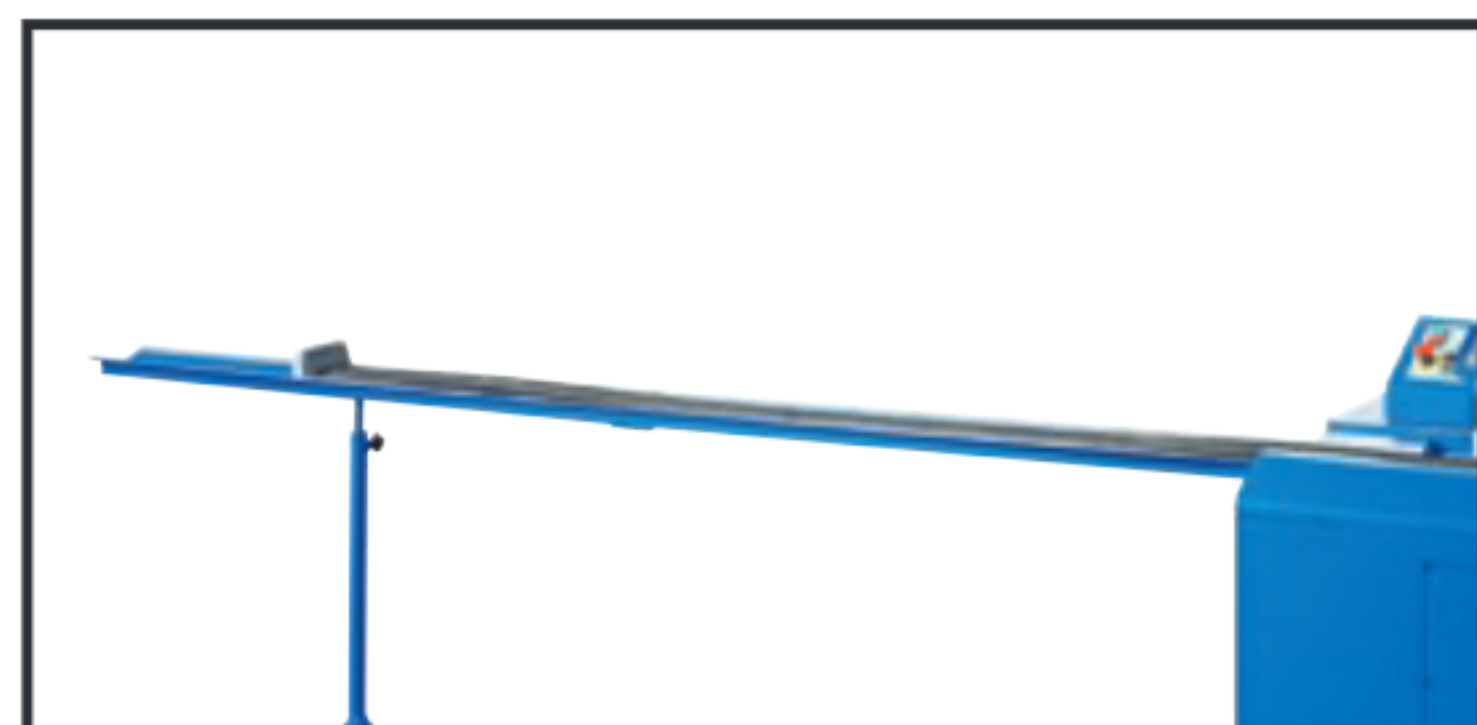

Measuring Hose Tray  
TRAY-KCS



Stroke Counter  
STROKE-KCS

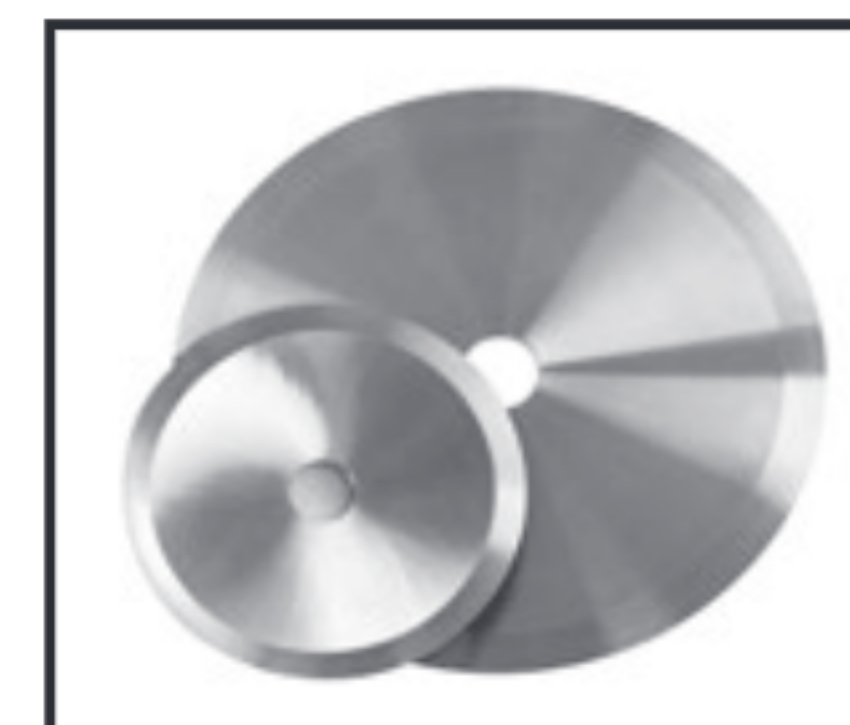

Smooth Blade  
BLADE-SMT400



Diamond Blade  
BLADE-DIA400

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.