


## T350LL / T350LH

### 225 PSI Premium Paper Mill/Creamery Wash Down Hose – No Nozzle

**3-A**  
COMPLIANT MATERIAL

T350LL  
White Cover

T350LH  
Red Cover

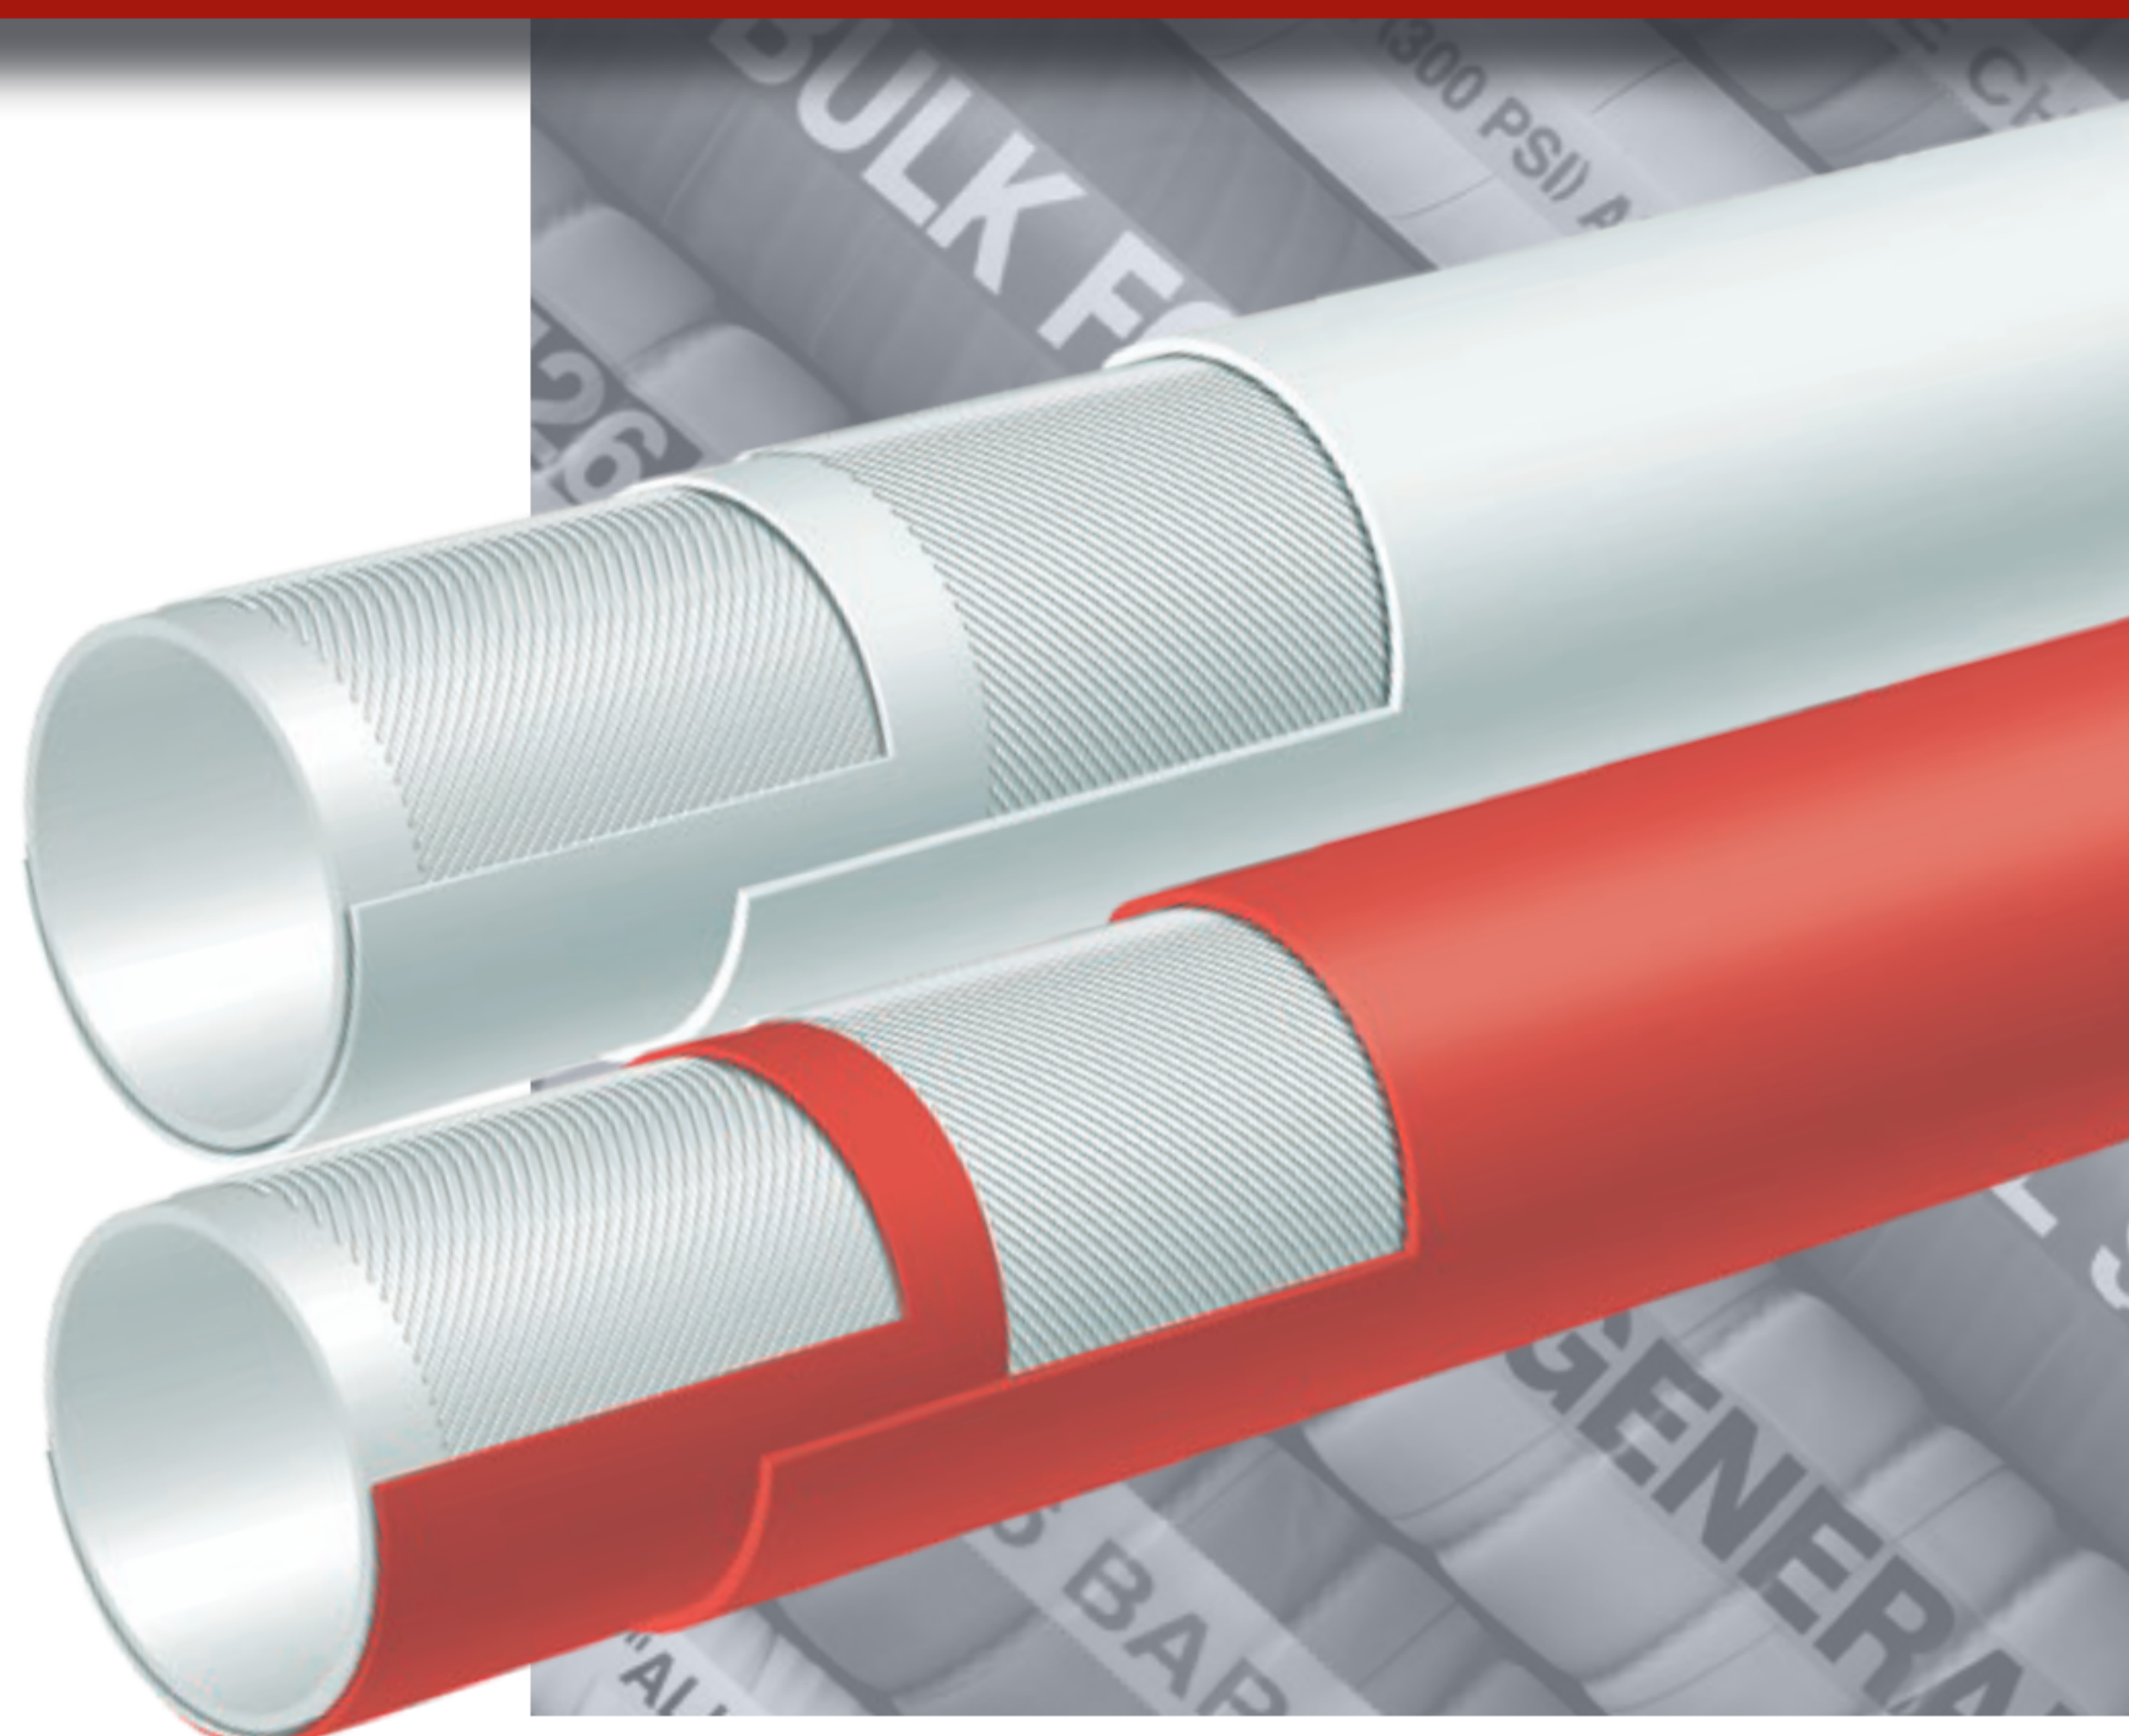

#### General Applications:

For general wash down service, using hot water or low pressure saturated steam in processing plants and facilities and in food and dairy plants.

#### Construction:

**Tube:** White EPDM. Meets FDA and 3A (18-03) requirements.

**Reinforcement:** High tensile textile cords.

**Cover:** Red EPDM – heat, abrasion and ozone resistant. White EPDM – heat, abrasion and ozone resistant.

#### Working Pressure:

Constant Pressure – 15 Bar (225 PSI)

#### Steam Pressure:

Constant Pressure – 6 Bar (90 PSI)

#### Service Temperature Range:

Water -40°F (-40°C) to +248°F (+120°C)

Steam +330°F to (+165°C)

#### Branding:

ALFAGOMMA – ITALY – T350 6 BAR (90 PSI) STEAM 15 BAR (225 PSI) HOT WATER (embossed)

#### Standard Length:

200 feet – eliminates bulky hookups

\*T350 fully complies with the requirements listed in FDA CFR21.

### Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T350LL050	1/2	13	0.91	23	225	200	0.27
T350LL062	5/8	16	1.02	26	225	200	0.31
T350LL075	3/4	19	1.22	31	225	200	0.44
T350LL100	1	25	1.46	37	225	200	0.54
T350LL125	1 1/4	32	1.81	46	225	200	0.63
T350LL150	1 1/2	38	2.05	52	225	200	0.74
T350LL200	2	51	2.64	67	225	200	1.12
T350LH075	3/4	19	1.22	31	225	200	0.44
T350LH100	1	25	1.46	37	225	200	0.54

#### COUPLING SUGGESTIONS

Short shank, long shank couplings (NPT, GHT), barbed inserts attached with bands.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.