


T352AA Series 75 PSI Radiator Hose

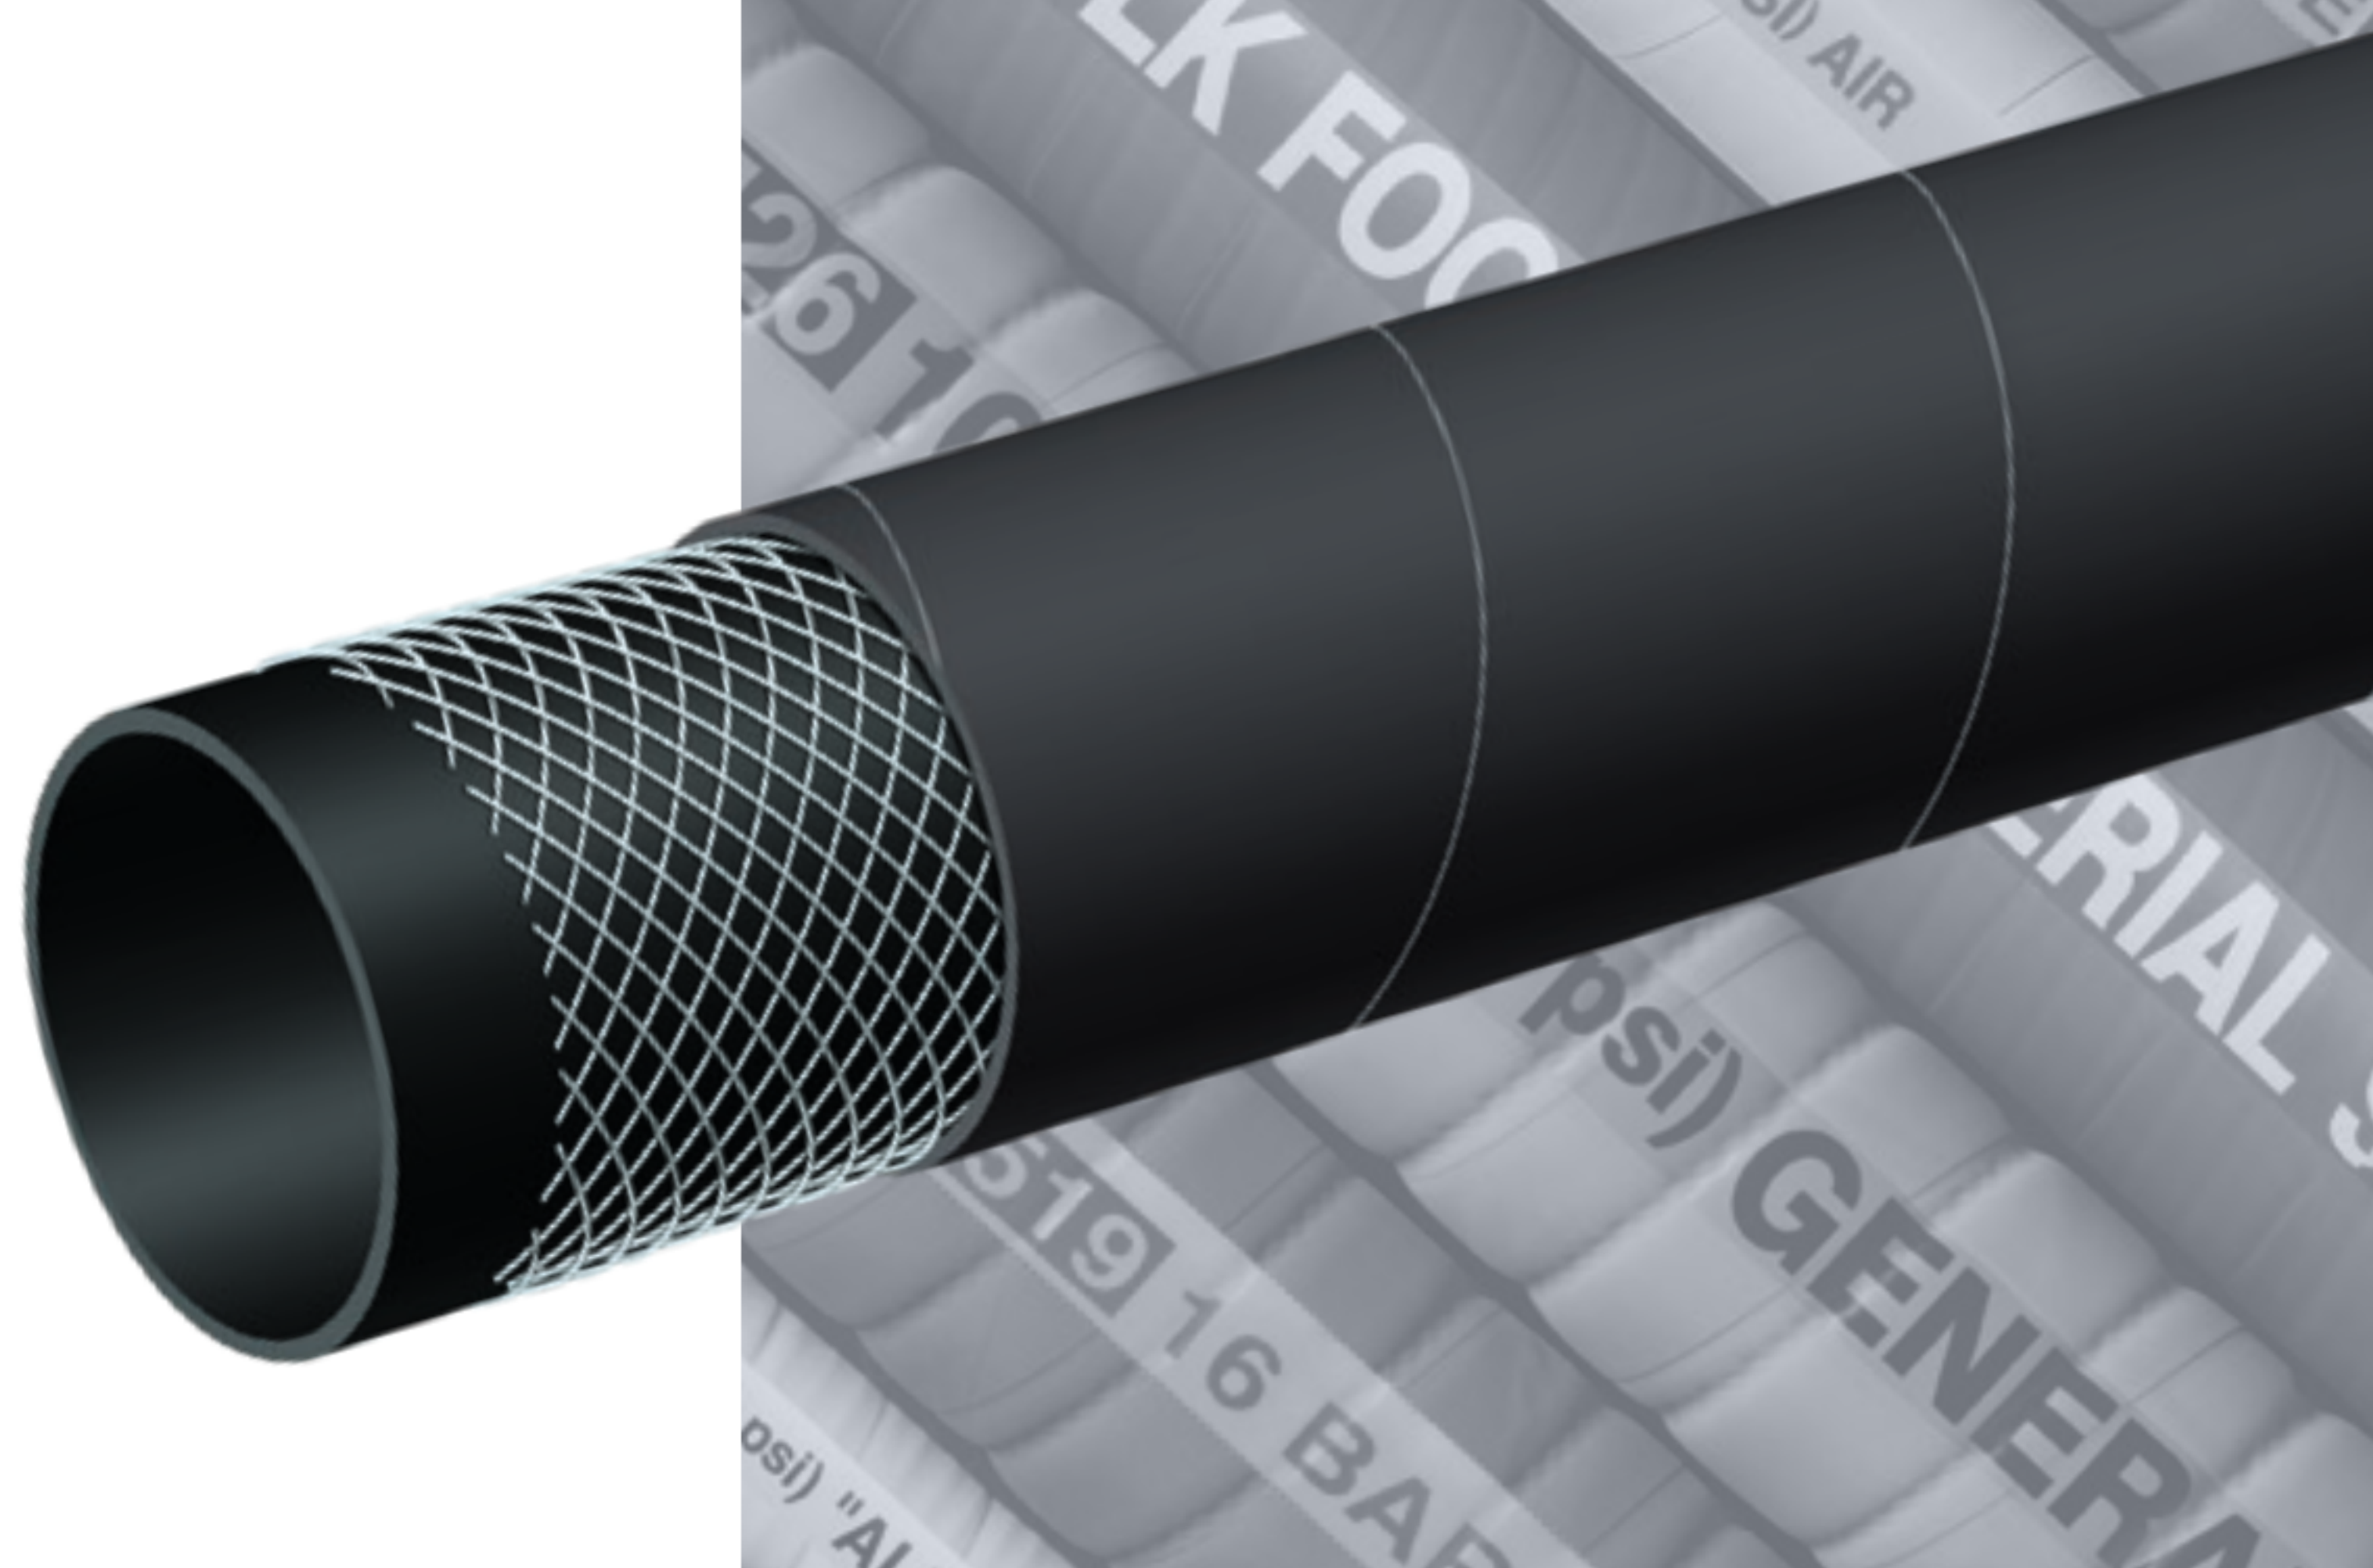

General Applications:

Radiator hose.

Construction:

Tube: Black EPDM.

Reinforcement: High tensile textile cords.

Cover: Black EPDM – heat, abrasion and ozone resistant.

Working Pressure:

5 Bar (75 PSI)

Service Temperature Range:

-40°F (-40°C) to +248°F (+120°C)

Branding:


ALFAGOMMA – ITALY – T-352 RADIATOR – DIN 73411 – dia mm / in. SAE 20R1-D2 (in yellow letters)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length Coils (ft)	Weight (lbs/ft)
T352AA050X12.6	1/2	13	0.83	21	75	12'6"	0.19
T352AA050X200	1/2	13	0.83	21	75	200'	0.19
T352AA062X12.6	5/8	16	0.94	24	75	12'6"	0.22
T352AA071X12.6	11/16	18	1.02	26	75	12'6"	0.24
T352AA078X12.6	13/16	20	1.10	28	75	12'6"	0.26
T352AA087X12.6	7/8	22	1.18	30	75	12'6"	0.28
T352AA087X200	7/8	22	1.18	30	75	200'	0.28
T352AA100X12.6	1	25	1.30	33	75	12'6"	0.32
T352AA100X200	1	25	1.30	33	75	200'	0.32
T352AA112X12.6	1 1/8	28	1.42	36	75	12'6"	0.34
T352AA112X200	1 1/8	28	1.42	36	75	200'	0.34
T352AA118X12.6	1 3/16	30	1.50	38	75	12'6"	0.37

continued

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

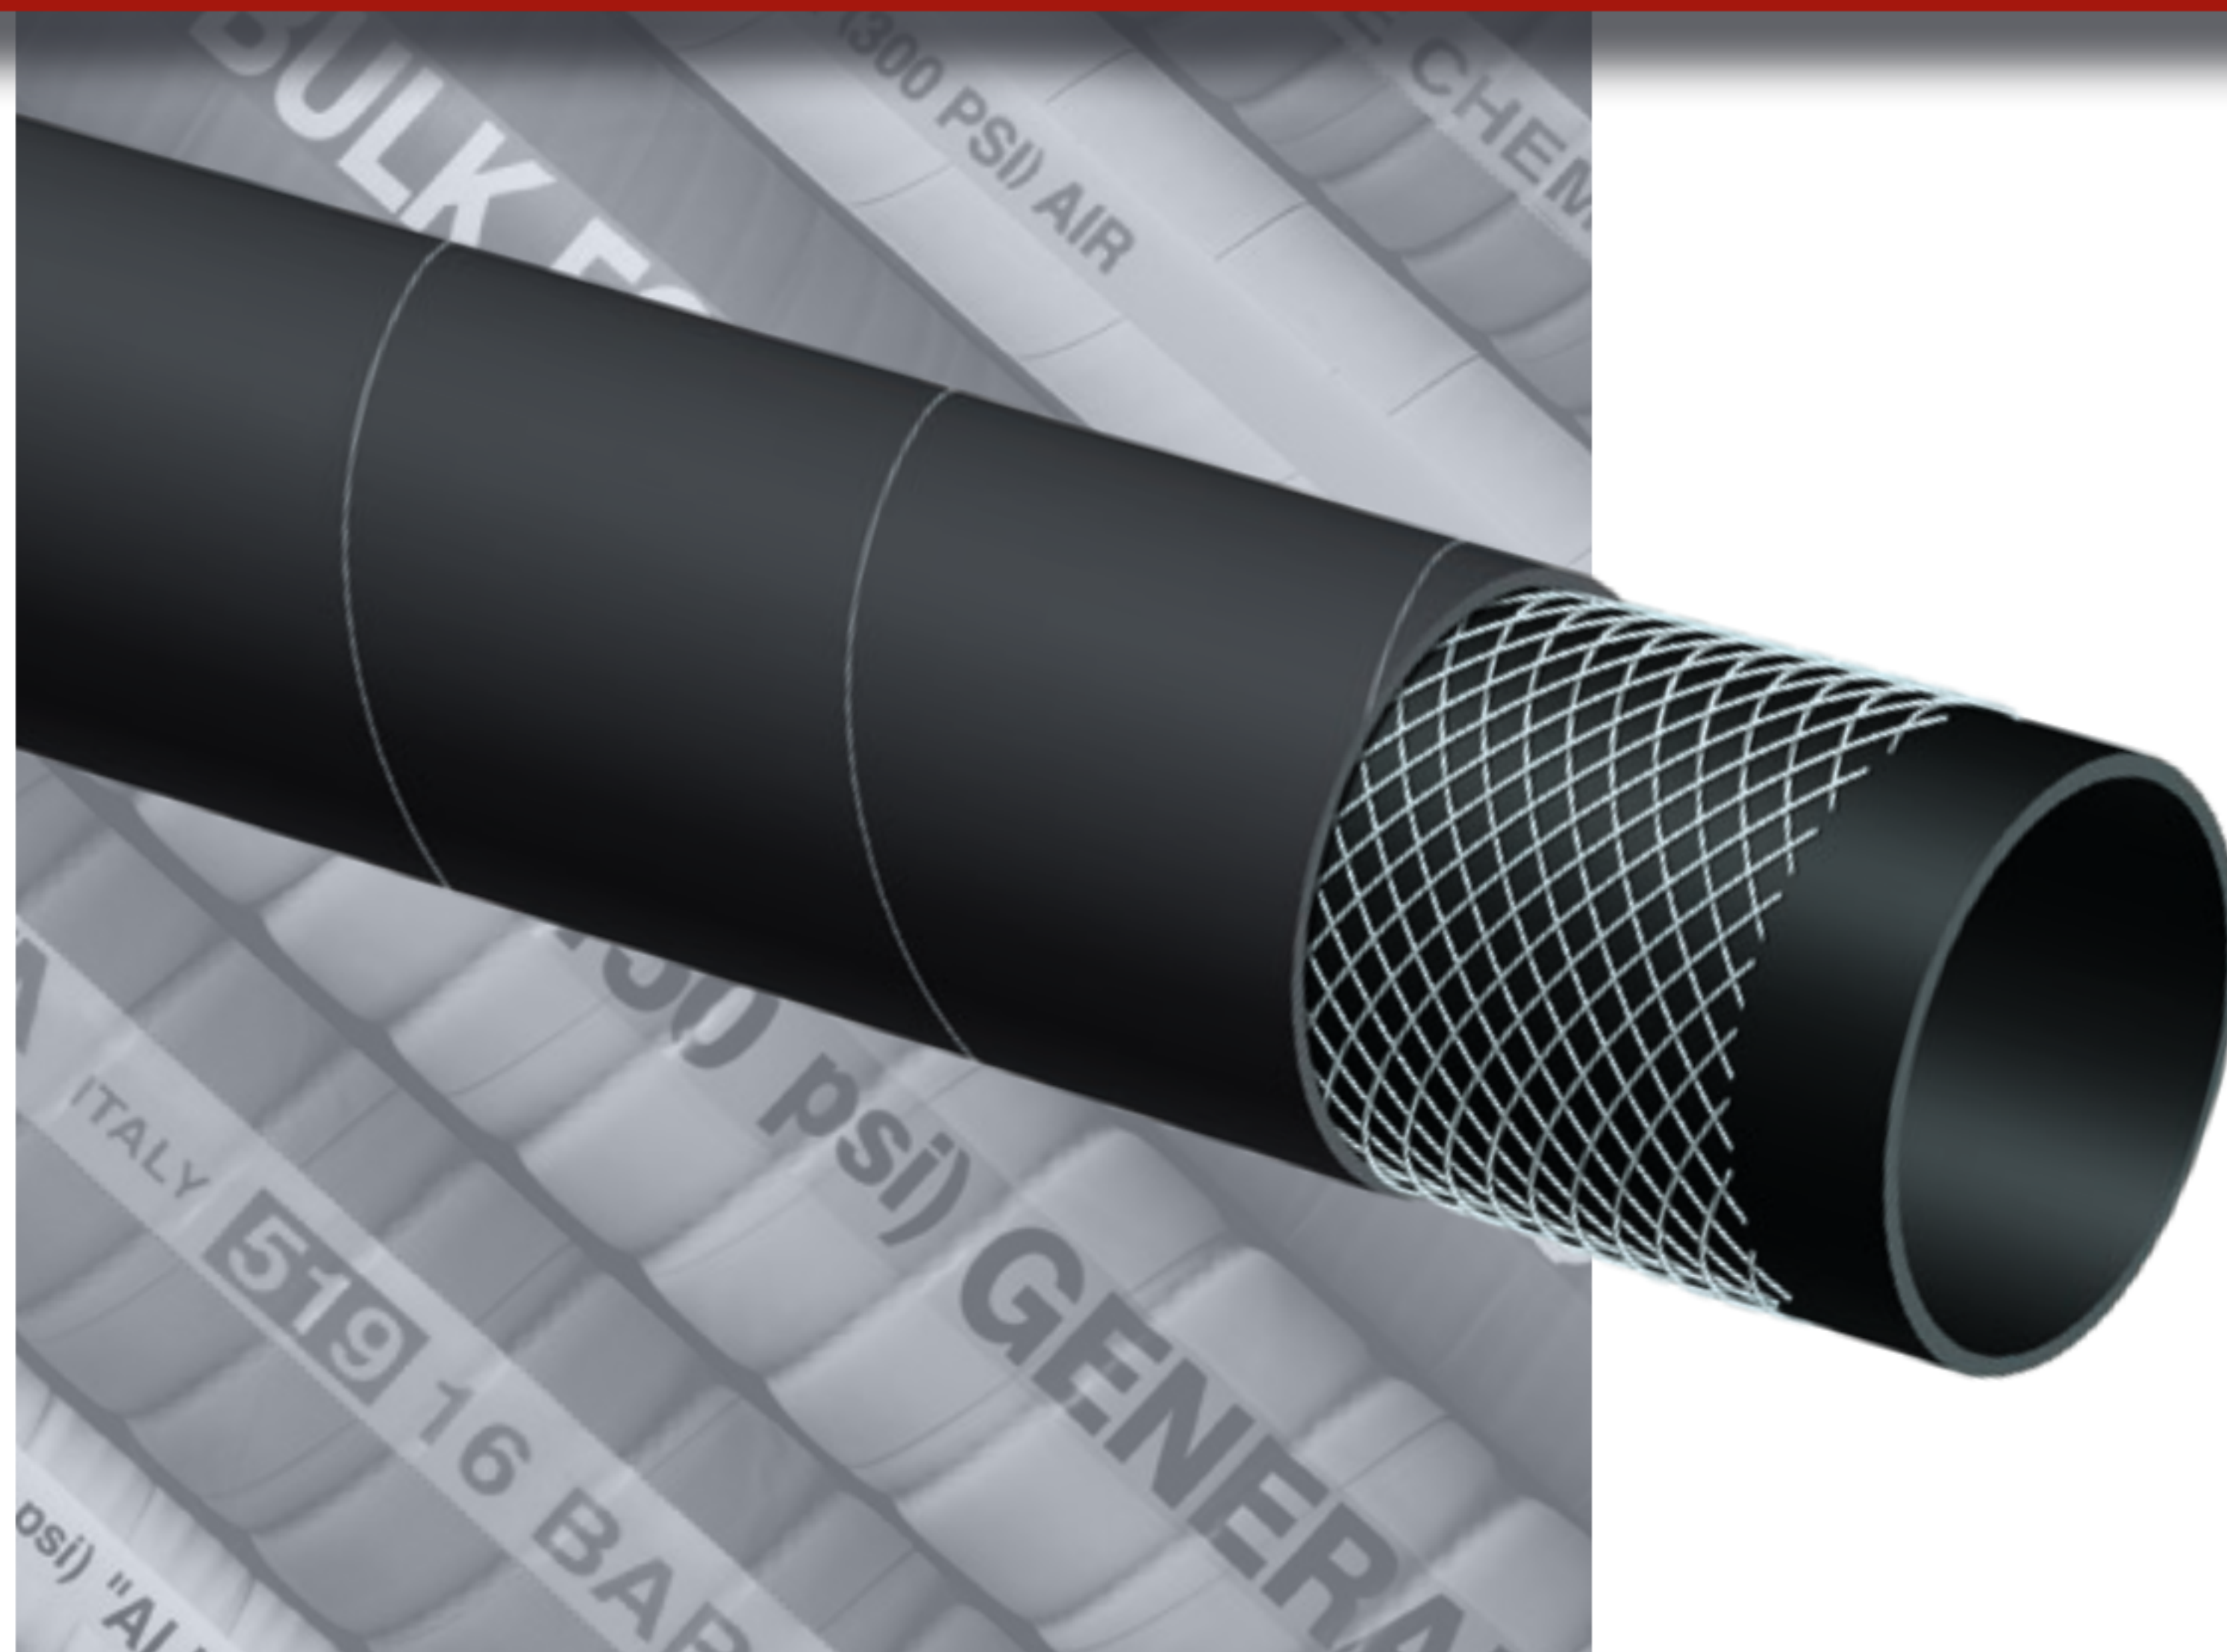

T352AA Series 75 PSI Radiator Hose

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length Coils (ft)	Weight (lbs/ft)
T352AA125X12.6	1 1/4	32	1.57	40	75	12'6"	0.39
T352AA125X200	1 1/4	32	1.57	40	75	200'	0.39
T352AA137X12.6	1 3/8	35	1.69	43	75	12'6"	0.42
T352AA150X12.6	1 1/2	38	1.89	48	75	12'6"	0.57
T352AA150X200	1 1/2	38	1.89	48	75	200'	0.57
T352AA157X12.6	1 9/16	40	1.97	50	75	12'6"	0.60
T352AA157X200	1 9/16	40	1.97	50	75	200'	0.60
T352AA162X12.6	1 5/8	42	2.05	52	75	12'6"	0.63
T352AA162X200	1 5/8	42	2.05	52	75	200'	0.63
T352AA175X12.6	1 3/4	45	2.17	55	75	12'6"	0.66
T352AA175X200	1 3/4	45	2.17	55	75	200'	0.66
T352AA189X12.6	1 7/8	48	2.28	58	75	12'6"	0.70
T352AA189X200	1 7/8	48	2.28	58	75	200'	0.70
T352AA200X12.6	2	51	2.40	61	75	12'6"	0.75
T352AA200X200	2	51	2.40	61	75	200'	0.75
T352AA218X12.6	2 3/16	55	2.56	65	75	12'6"	0.80
T352AA225X12.6	2 1/4	57	2.64	67	75	12'6"	0.82
T352AA238X12.6	2 3/8	60	2.76	70	75	12'6"	0.86
T352AA250X12.6	2 1/2	63	2.87	73	75	12'6"	0.90
T352AA275X12.6	2 3/4	70	3.15	80	75	12'6"	0.97
T352AA300X12.6	3	76	3.39	86	75	12'6"	1.04
T352AA315X12.6	3 1/8	80	3.54	90	75	12'6"	1.10
T352AA354X12.6	3 9/16	90	4.02	102	75	12'6"	1.36
T352AA400X12.6	4	102	4.49	114	75	12'6"	1.52
T352AA450X12.6	4 1/2	116	5.00	127	75	12'6"	1.69
T352AA500X12.6	5	127	5.55	141	75	12'6"	2.16

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.