


## T6D1AA Series 400 PSI Oil Rigger / Frack Discharge Hose

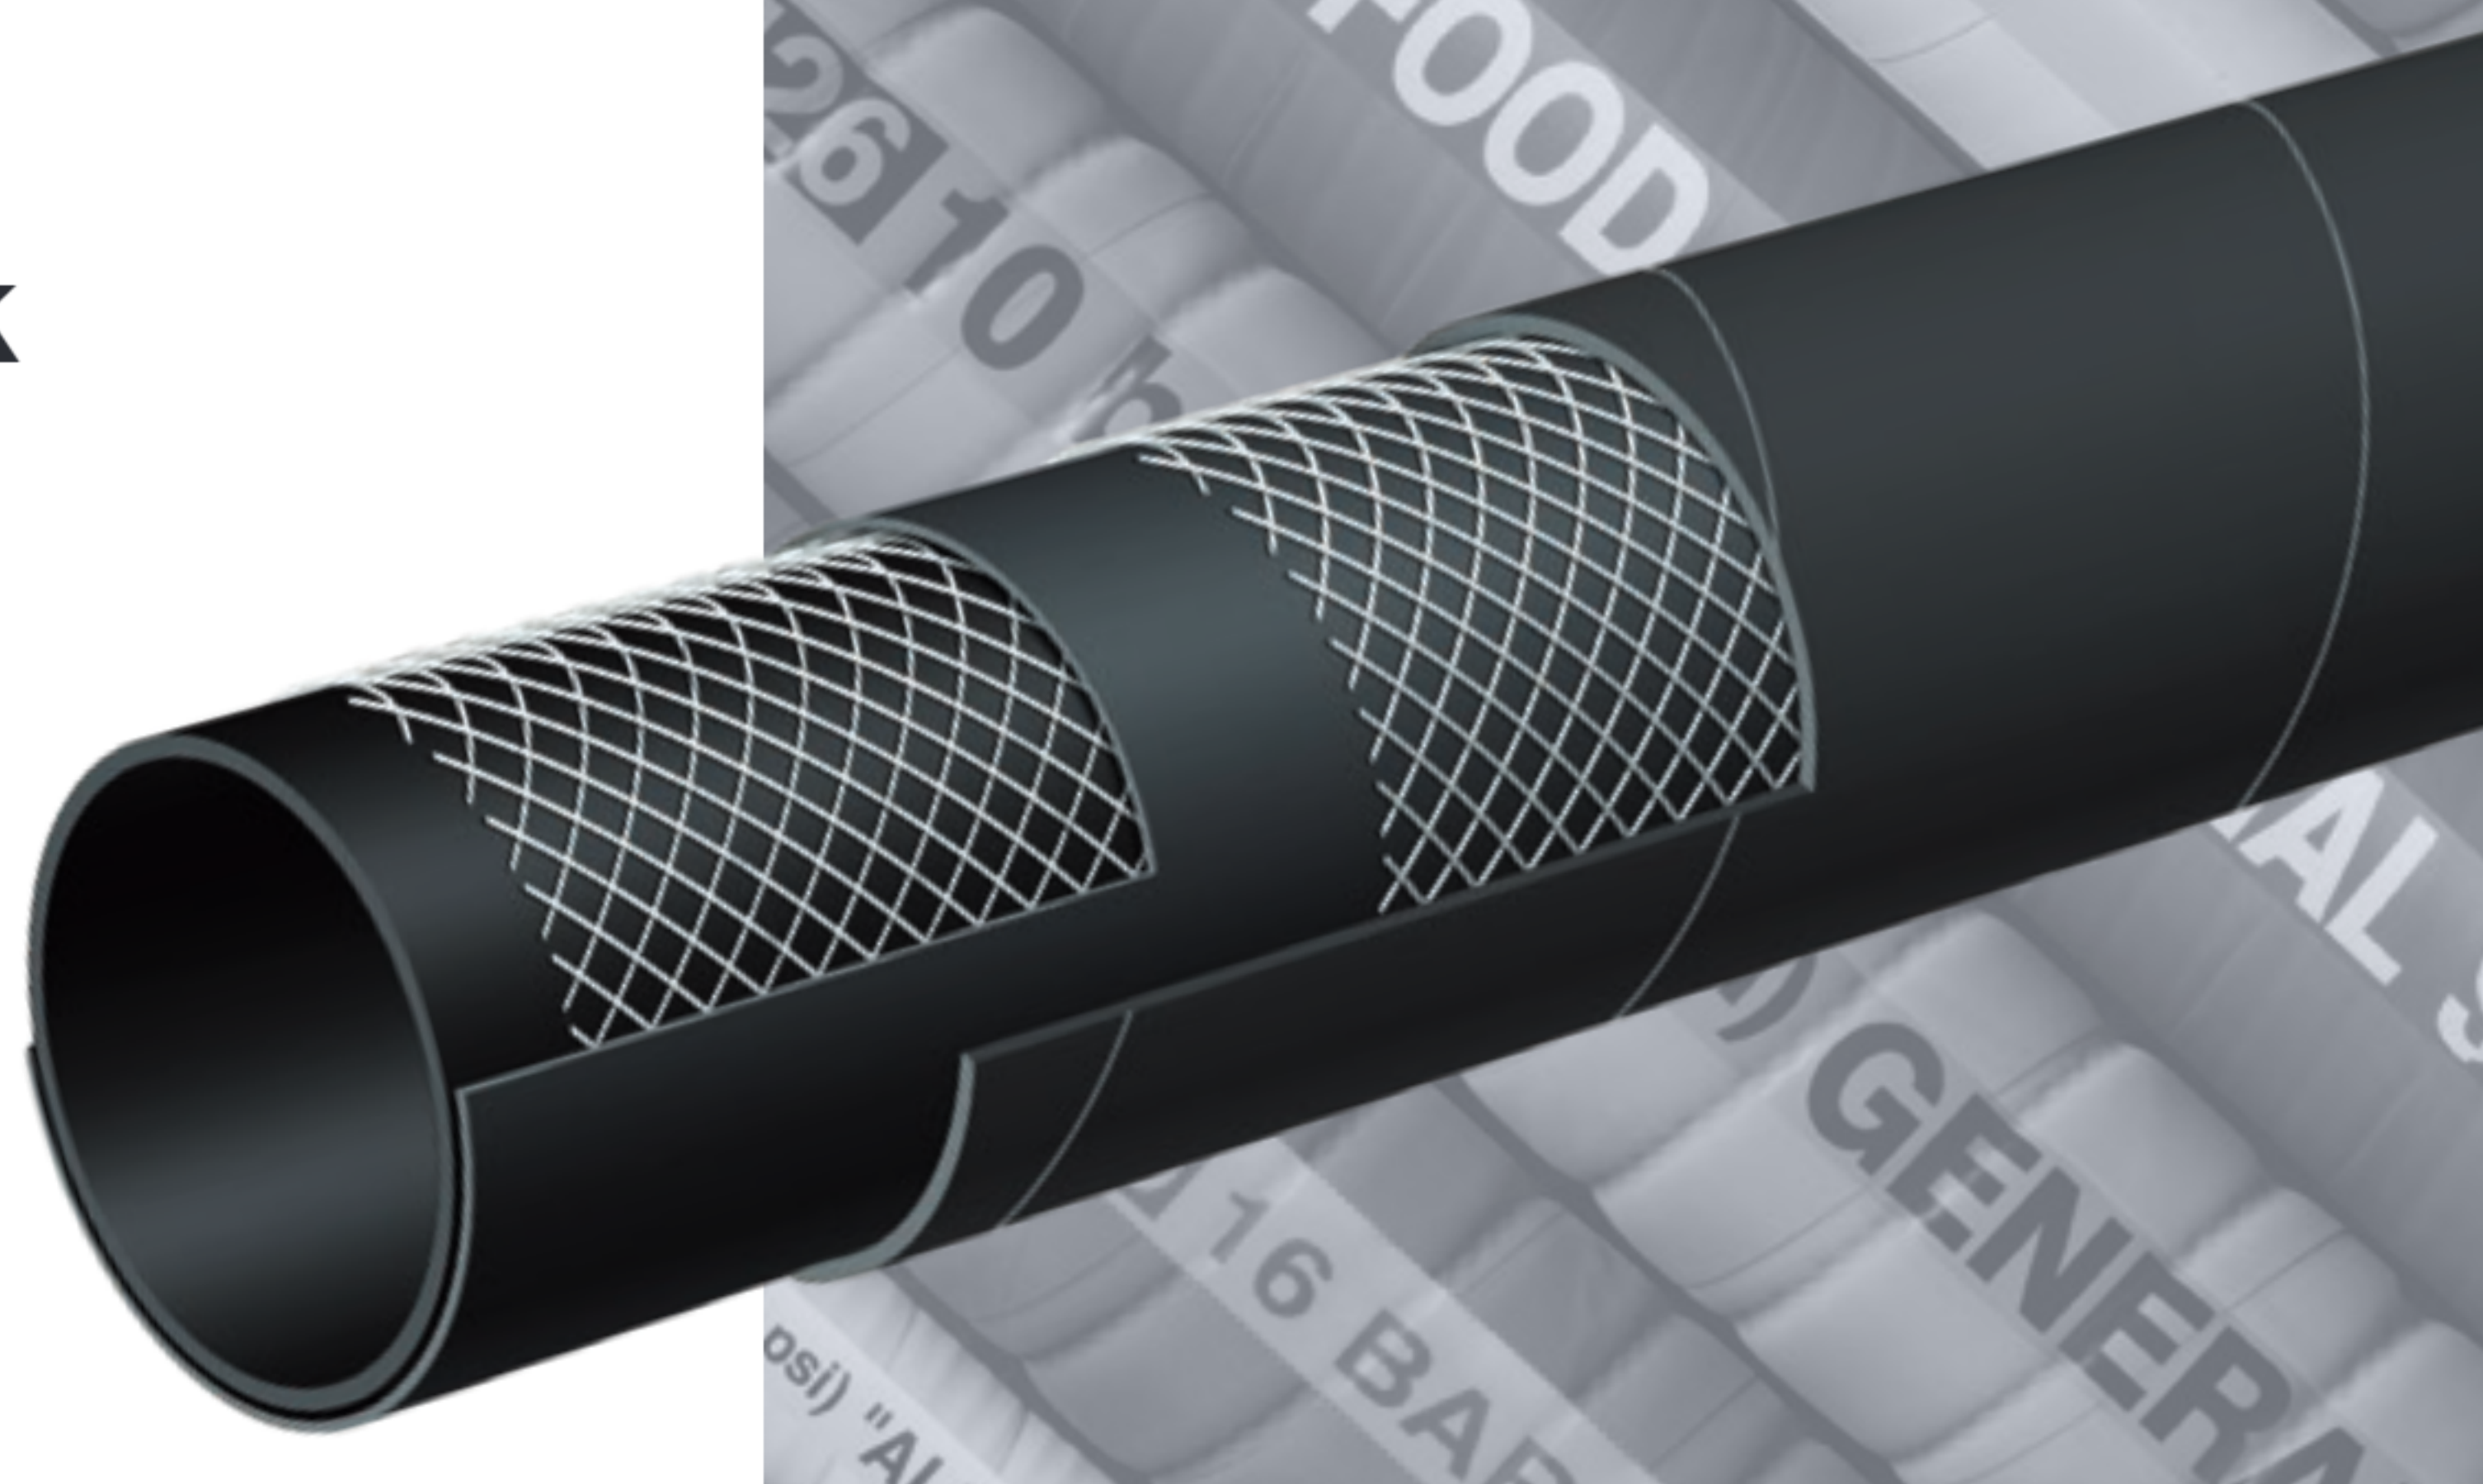

### General Applications:

Fracking fluids, liquid mud and crude oil delivery in oil field and gas exploration.

### Construction

**Tube:** Black synthetic elastomer.

**Reinforcement:** High tensile textile cords.

**Cover:** Black synthetic elastomer – abrasion, oil and ozone resistant.

### Working Pressure:

Constant Pressure – 27 Bar (400 PSI)

### Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

### Branding:

ALFAGOMMA – ITALY OIL RIGGER – FRACK 27 BAR (400 PSI) (in blue letters)

## Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T6D1AA400	4	102	4.72	120	400	100	2.89

### COUPLING SUGGESTIONS

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.