


## CT601AA Series 150 PSI Corrugated Oil Rigger/Oil Field-Frack Tank Hose

**CORRUGATED**

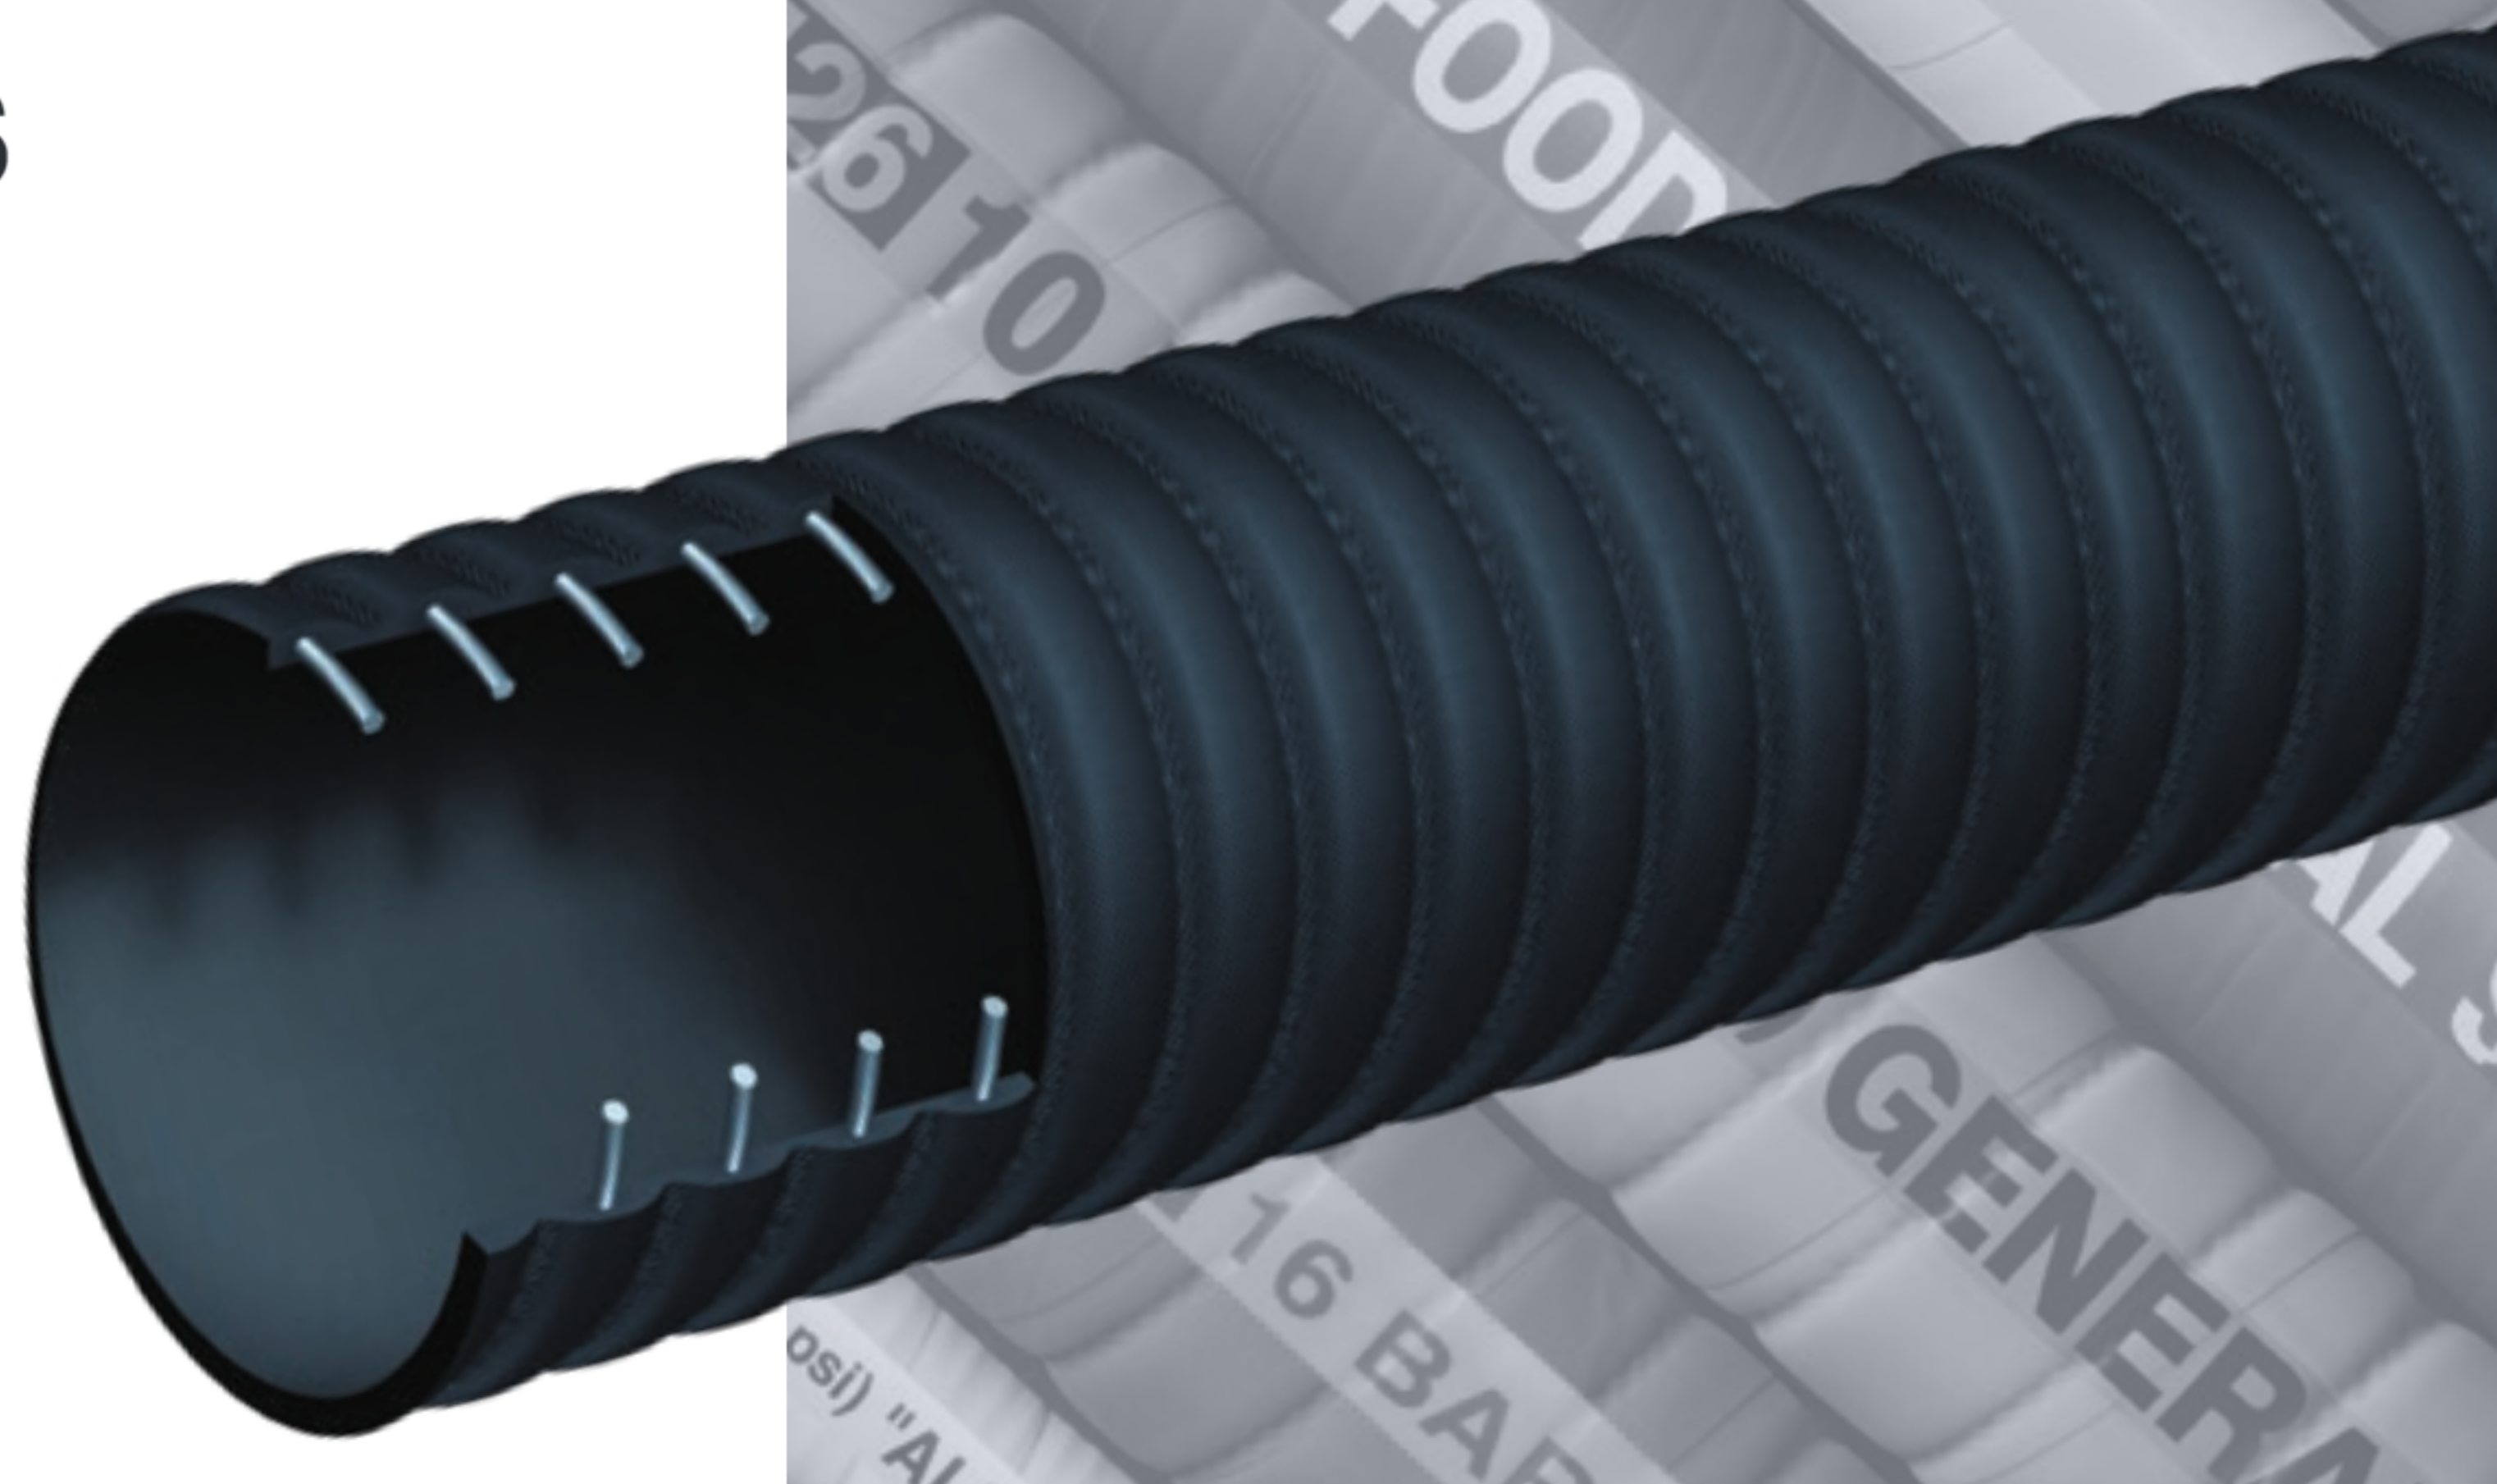

### General Applications:

Oil field vacuum tank service, for handling crude oil, frack solutions and slurries.

**Note:** For applications up to 35% aromatics.  
**Not for use with refined petroleum products.**

### Construction:

**Tube:** Black Nitrile – PVC blend, limited oil resistance, for oil field use.

**Reinforcement:** High tensile textile cords with flexible steel helix wire.

**Cover:** Black corrugated SBR – abrasion, ozone, limited oil resistance.

### Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

### Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

### Branding:

ALFAGOMMA – ITALY T6C1 10 BAR (150 PSI)  
OIL FIELD-FRACK TANK S & D (in blue letters)

## Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
CT601AA200	2	51	2.40	61	150	30	6	100	0.86
CT601AA300	3	76	3.46	88	150	27	9	100	1.61
CT601AA400	4	102	4.49	114	150	27	12	100	2.39

### COUPLING SUGGESTIONS

Quick-Acting couplings or combination nipples attached with bands.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.