


T606AE Series 150 PSI Corrugated Petroleum S & D – Arctic Hose

CORRUGATED

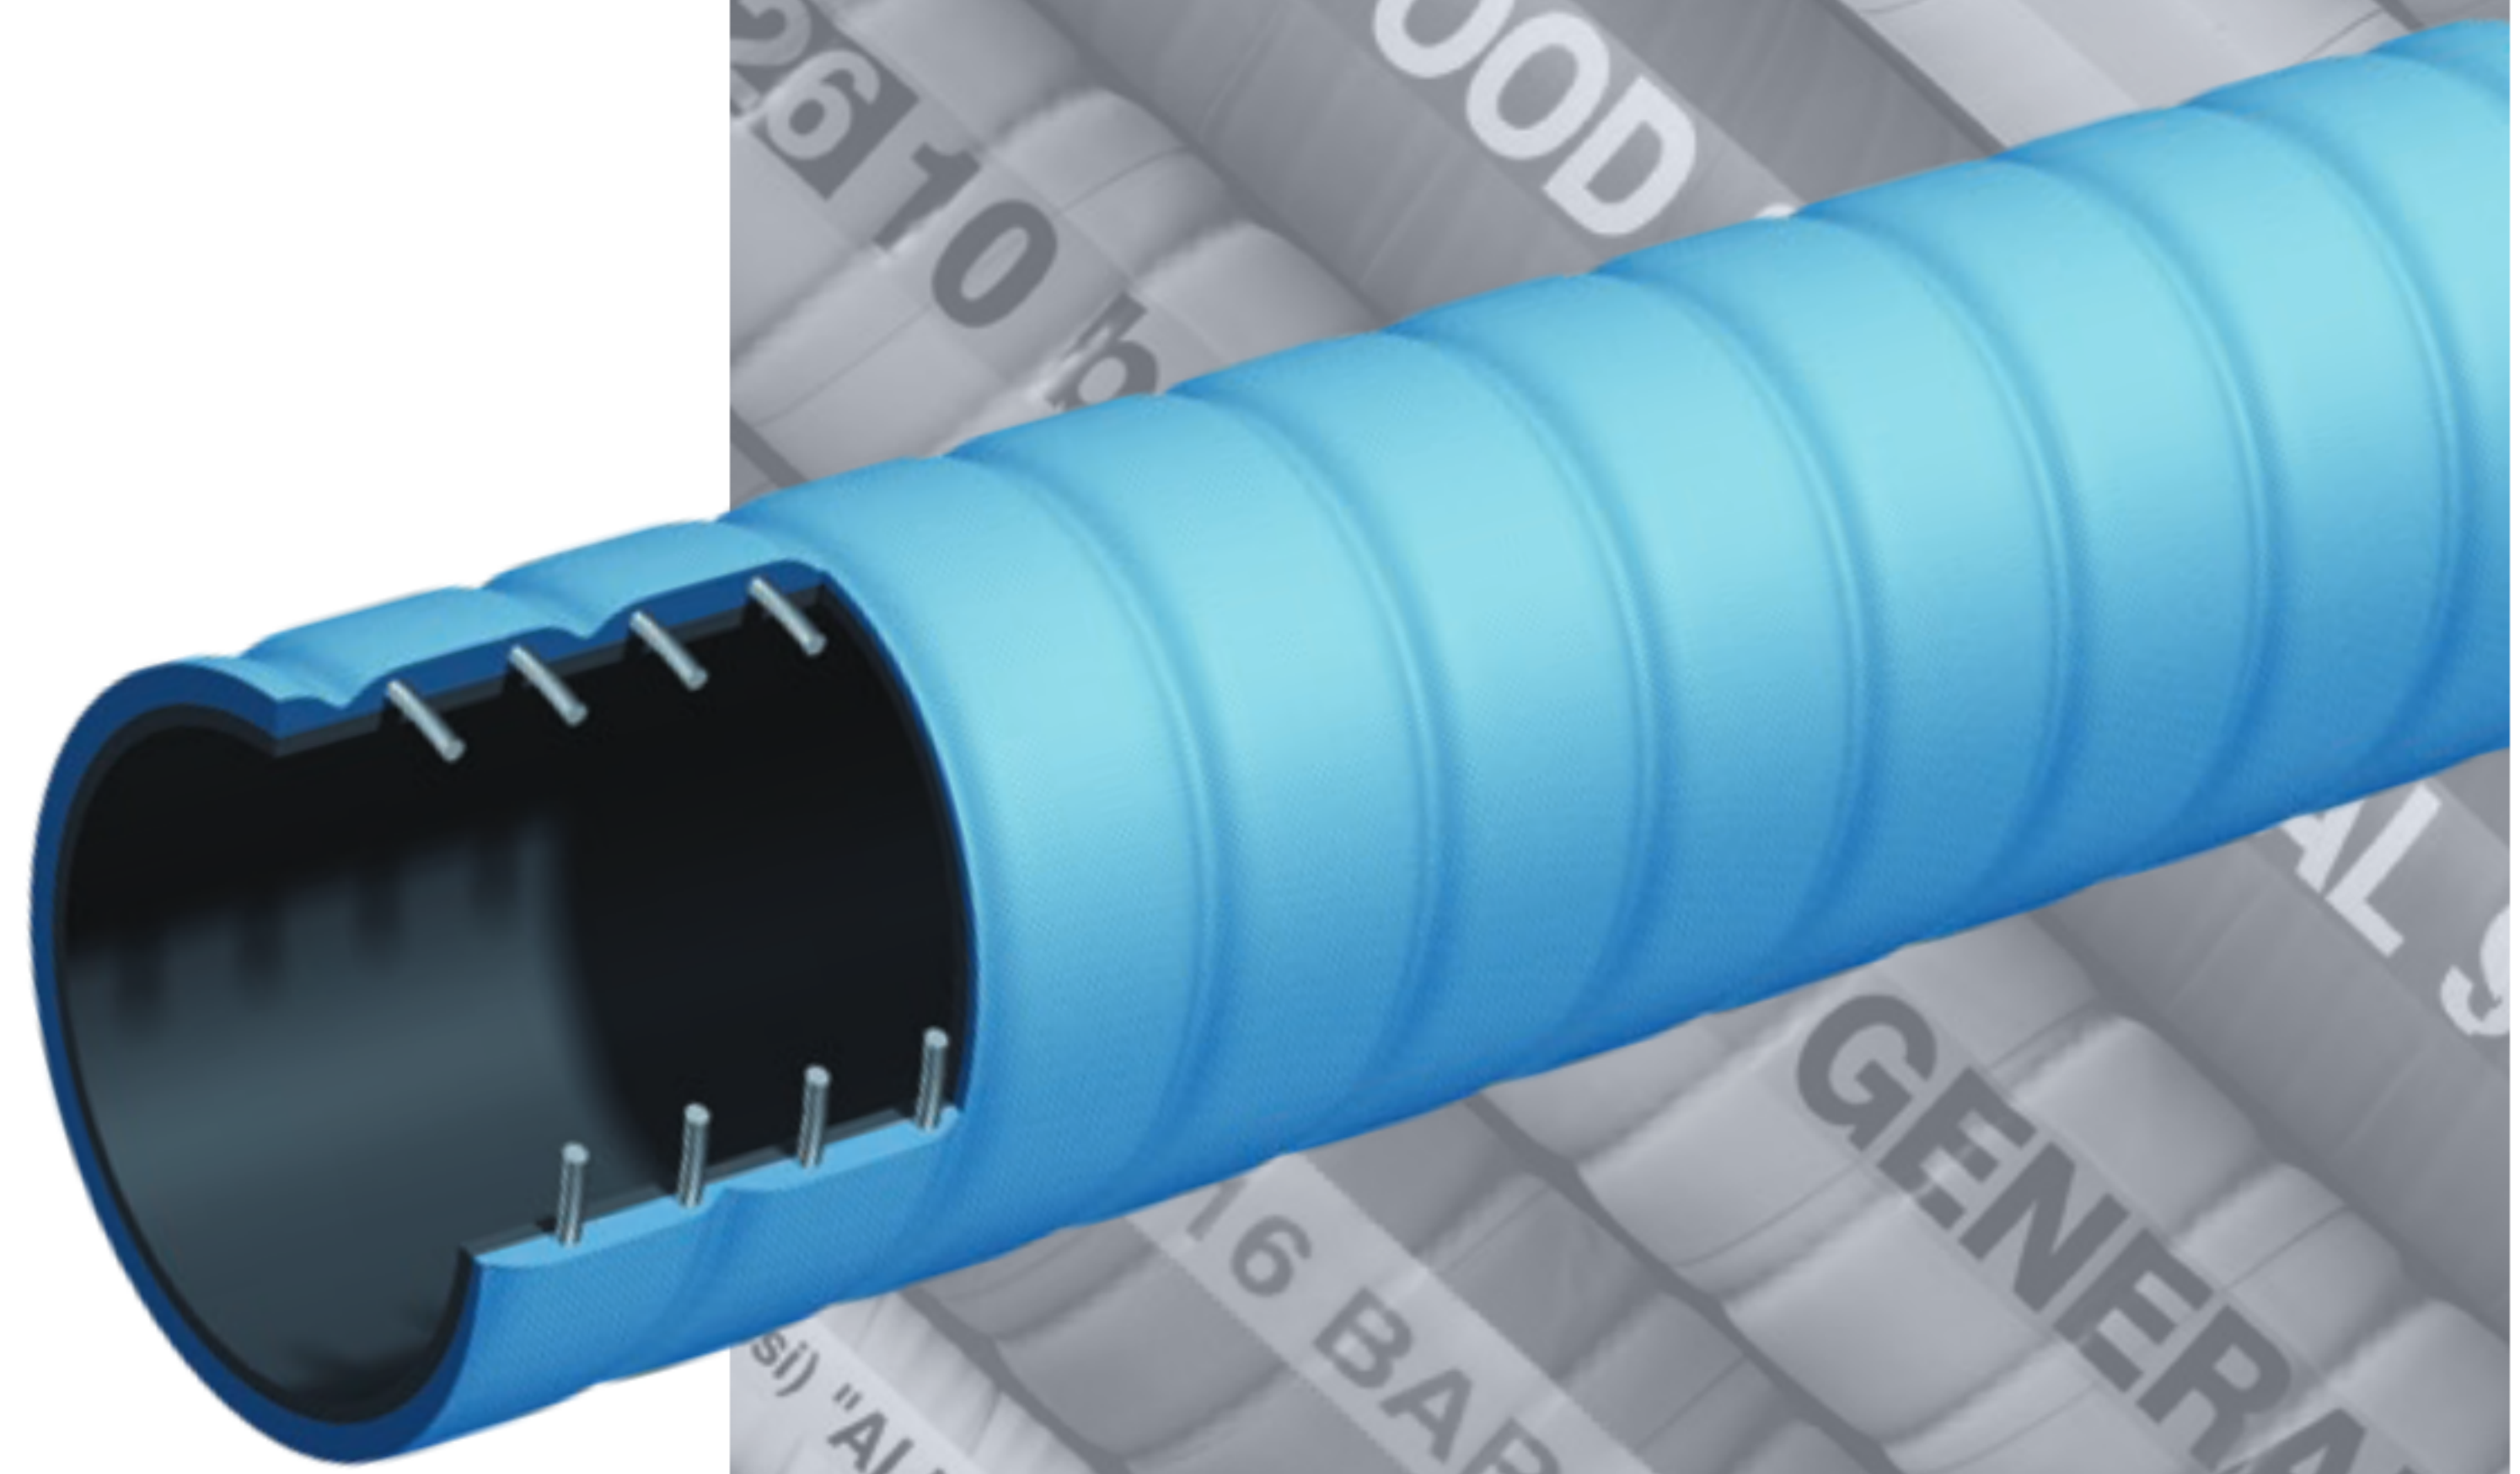

General Applications:

For suction and discharge applications in truck and tank car transfer of gasoline, oil and other petroleum-based products with up to 50% aromatic content. Where extreme flexibility is needed in low temperature.

Construction:

Tube: Black conductive NBR.

Reinforcement: High tensile textile cords with flexible steel helix wire.

Cover: Blue corrugated – abrasion, ozone and hydrocarbon resistant.

Working Pressure:

Constant Pressure – 150 PSI

Service Temperature Range:

-65°F (-54°C) to +180°F (+82°C)

Branding:

ALFAGOMMA – ITALY T606 – 10 BAR (150 PSI)
PETROLEUM – S & D Arctic (in blue letters on yellow layline)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T606AE200	2	51	2.48	63	150	30	3	100	1.06
T606AE300	3	76	3.54	90	150	30	4 1/2	100	1.84
T606AE400	4	102	4.57	116	150	30	6	100	2.67

COUPLING SUGGESTIONS

Quick-Acting, combination nipples attached with bands or internally expanded brass couplings with gasket seal attached with ferrules.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.