


T720AA Series Bulk Material S & D Hose

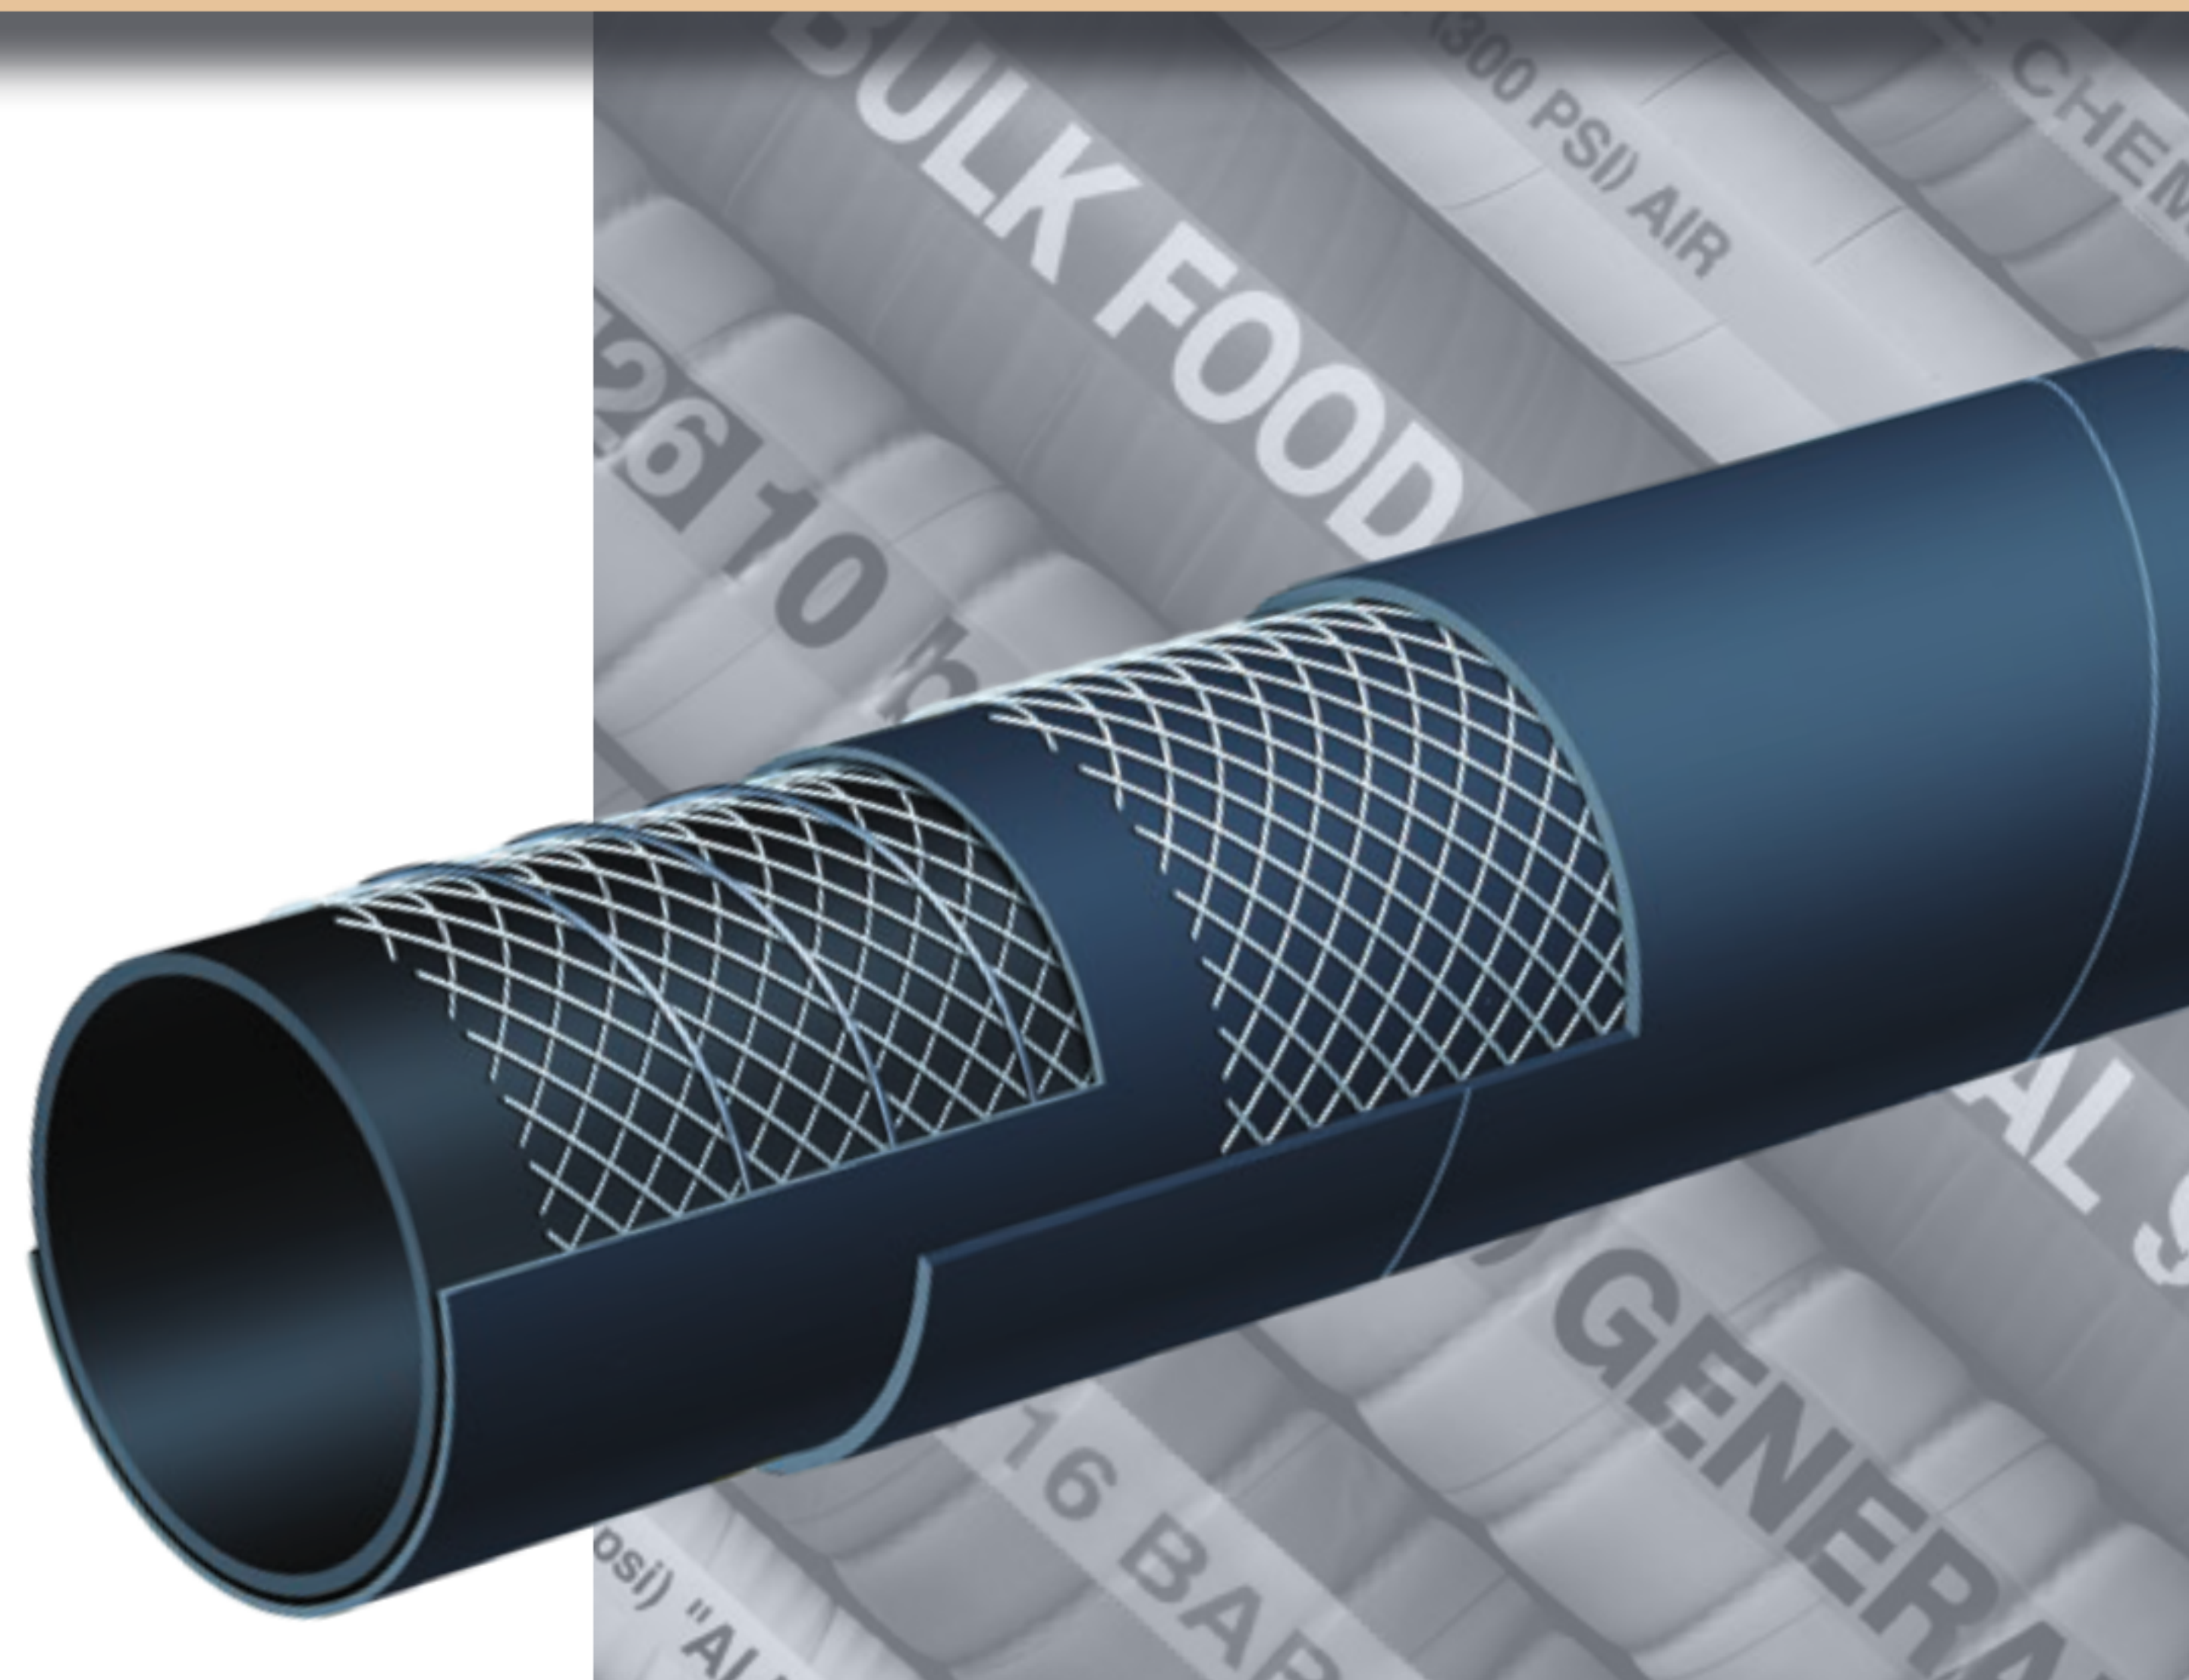

General Applications:

Suction and discharge of wet or dry abrasive materials. Designed for grains and dry cement.

Construction:

Tube: 3/16" black conductive NR – abrasion resistant.

Reinforcement: Spiraled high tensile textile cords with flexible steel helix wire.

Cover: Black conductive SBR/NR blend – abrasion and ozone resistant.

Working Pressure:

Constant Pressure –
10 Bar (150 PSI) for 2", 3", 4"
5 Bar (75 PSI) for 5", 6", 8"

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

ALFAGOMMA – ITALY T720 – BULK MATERIAL – S & D (in white letters)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T720AA200	2	51	2.56	65	150	30	6	100	0.97
T720AA300	3	76	3.54	90	150	27	9	100	1.54
T720AA400	4	102	4.57	116	150	27	12	50/100	2.15
T720AA500	5	127	5.63	143	75	24	20	20/50	3.20
T720AA600	6	152	6.61	168	75	24	24	20/50	4.01
T720AA800	8	203	8.70	221	75	21	32	20	6.05

COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.