


# Water Discharge



## T253AA Series 150 PSI EPDM Layflat Water Discharge Hose

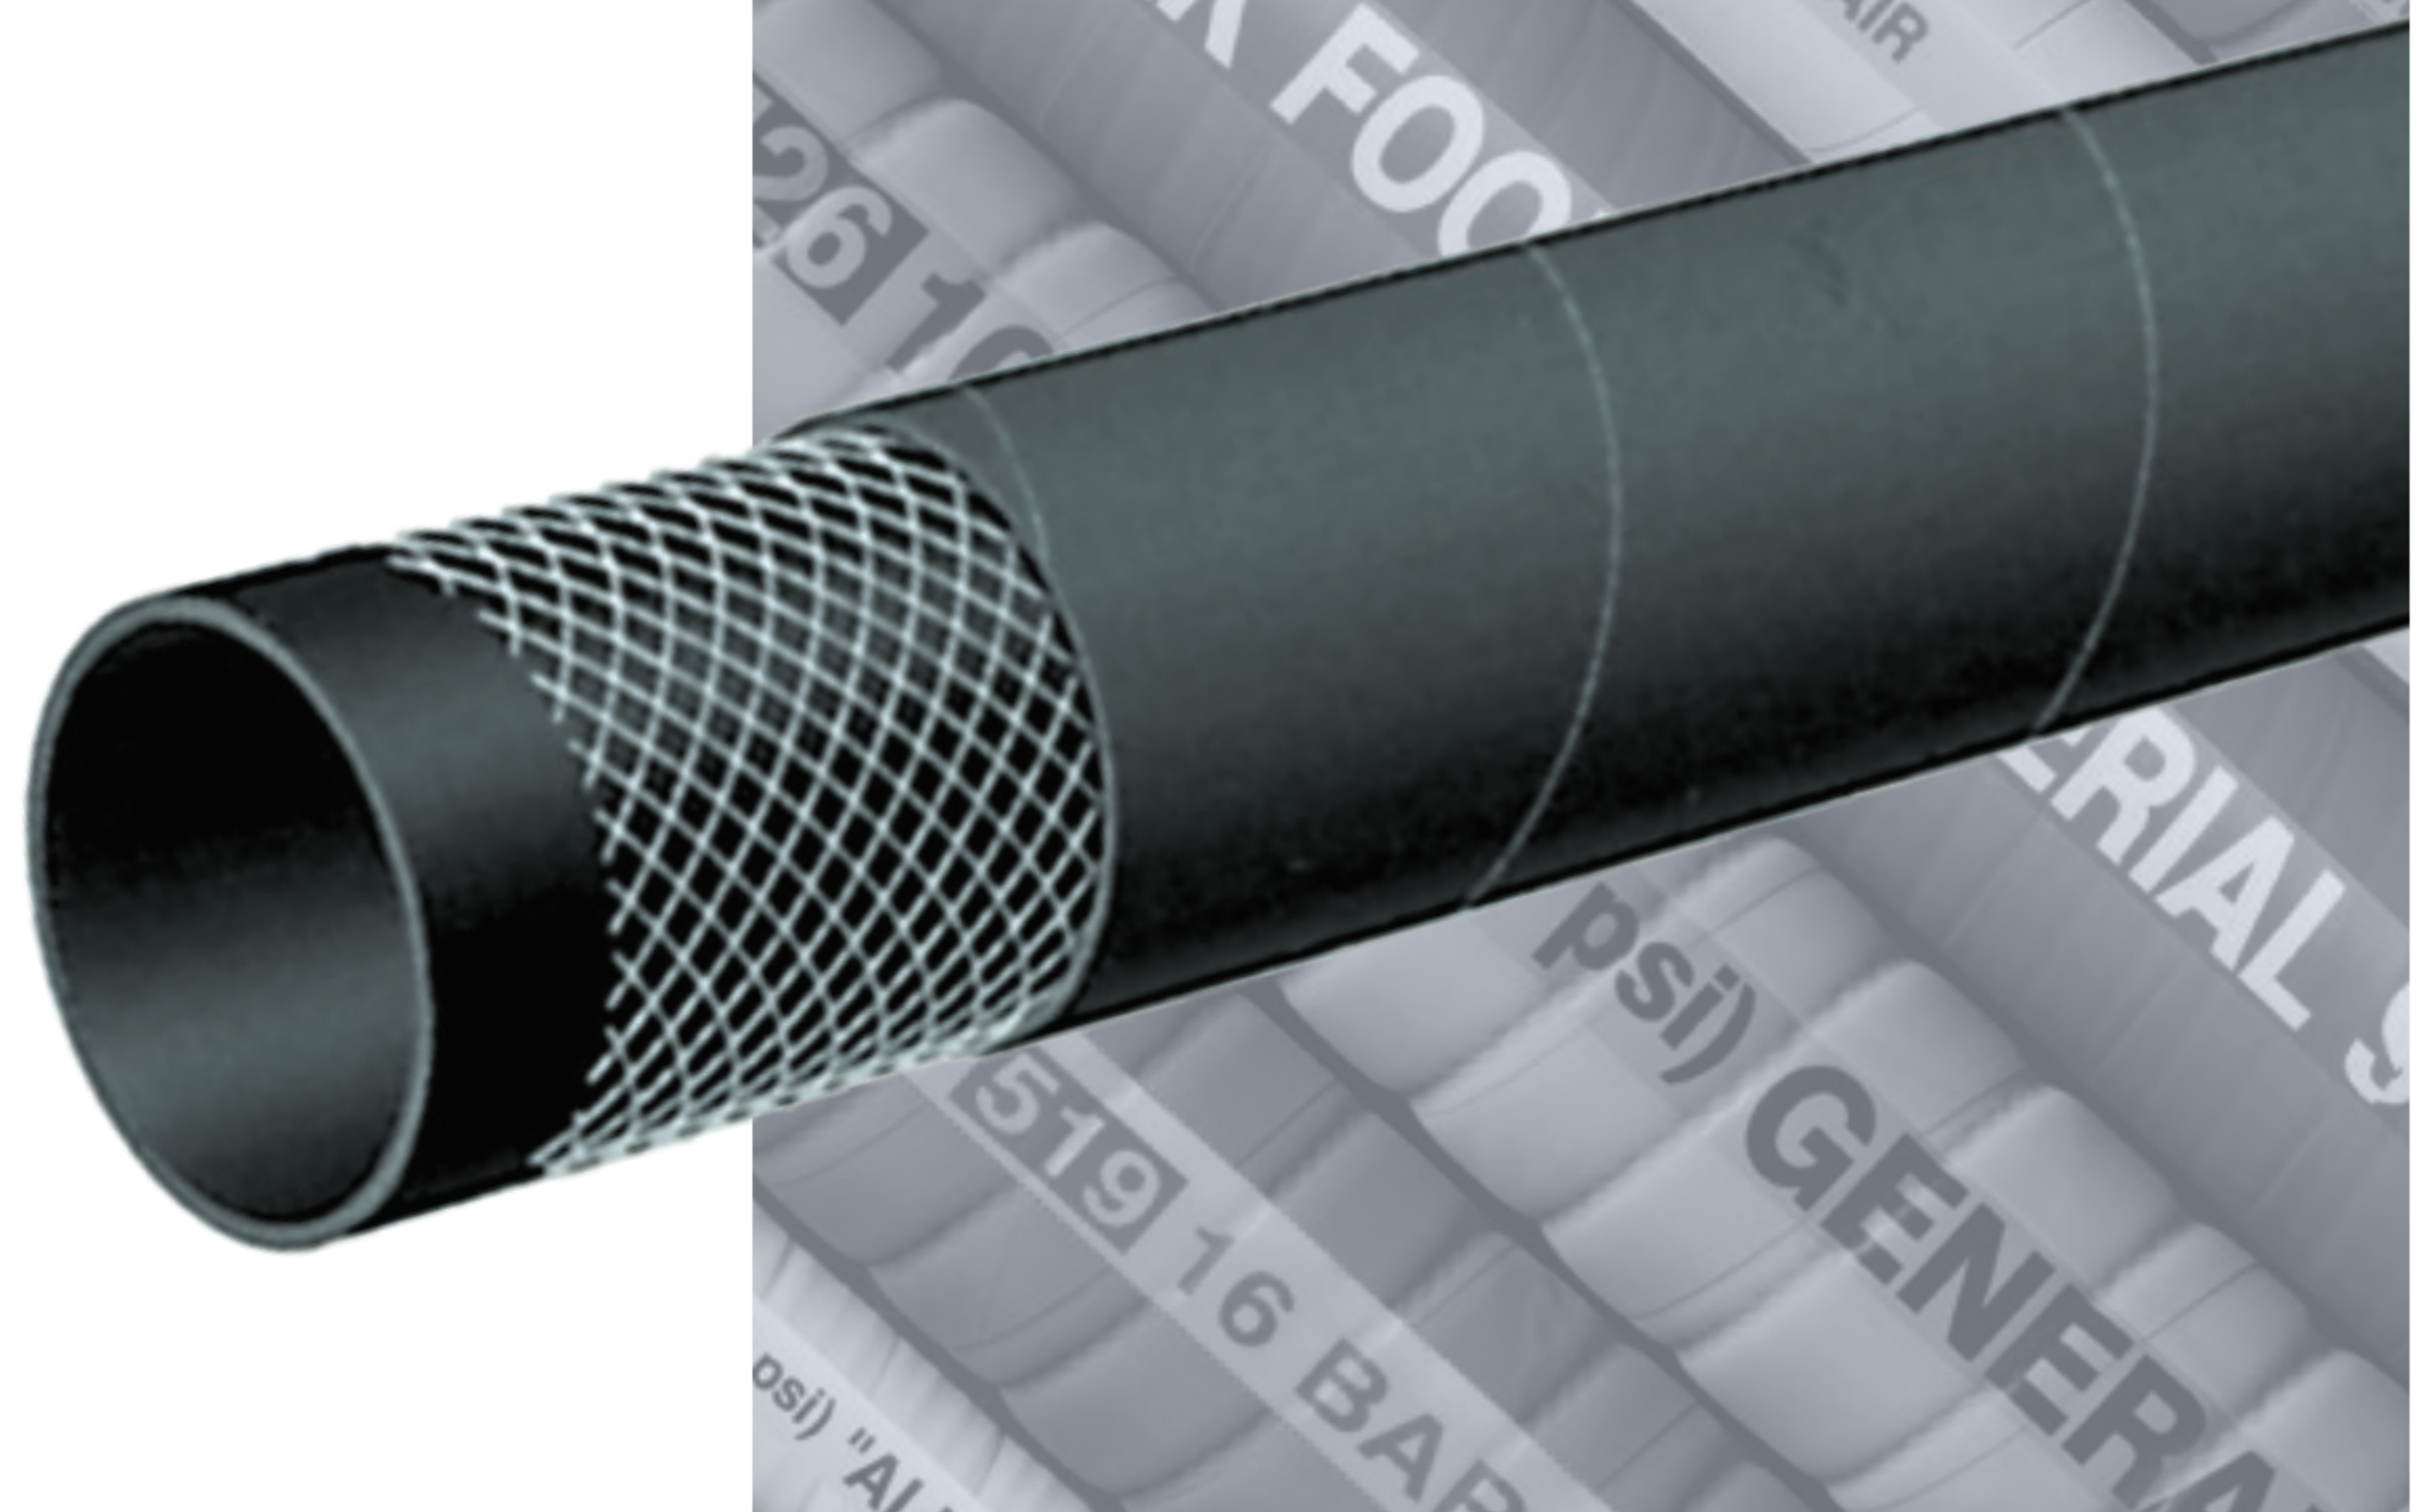

FOR APPLICATIONS INVOLVING INDUSTRIAL ACID CHEMICALS AND ALCOHOLS, PLEASE REFER TO T505OG AND T509OE CHEMICAL HOSES

### General Applications:

High pressure, 150 PSI lay flat type hose for general industrial construction and irrigation.

### Construction:

**Tube:** Black EPDM.

**Reinforcement:** High tensile textile cords.

**Cover:** Black EPDM – abrasion and ozone-resistant.

### Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

### Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

### Branding:

Alfagomma – Italy – T253 10 Bar (150 PSI) EPDM WATER DISCHARGE (in green letters)

## Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T253AA150	1 1/2	38	1.81	46	150	100	0.37
T253AA200	2	51	2.32	59	150	100	0.50
T253AA250	2 1/2	63	2.80	71	150	100	0.60
T253AA300	3	76	3.31	84	150	100	0.86
T253AA400	4	102	4.33	110	150	100	1.19
T253AA600	6	152	6.38	162	150	50/100	2.00
T253AA662	6 5/8*	168	7.01	178	150	50/100	2.17
T253AA800	8	203	8.46	215	150	50/100	2.82
T253AA1000	10	254	10.63	270	150	50/100	5.11
T253AA1200	12	305	12.56	319	150	50	5.93

\* 6<sup>5</sup>/<sub>8</sub>" referred to as Elephant Trunk Hose – Ideal for “Irrigation Boots.”

### COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.