


T600AA Series Hard Wall Marine Exhaust Hose USCG/SAE J1527 A2/B2

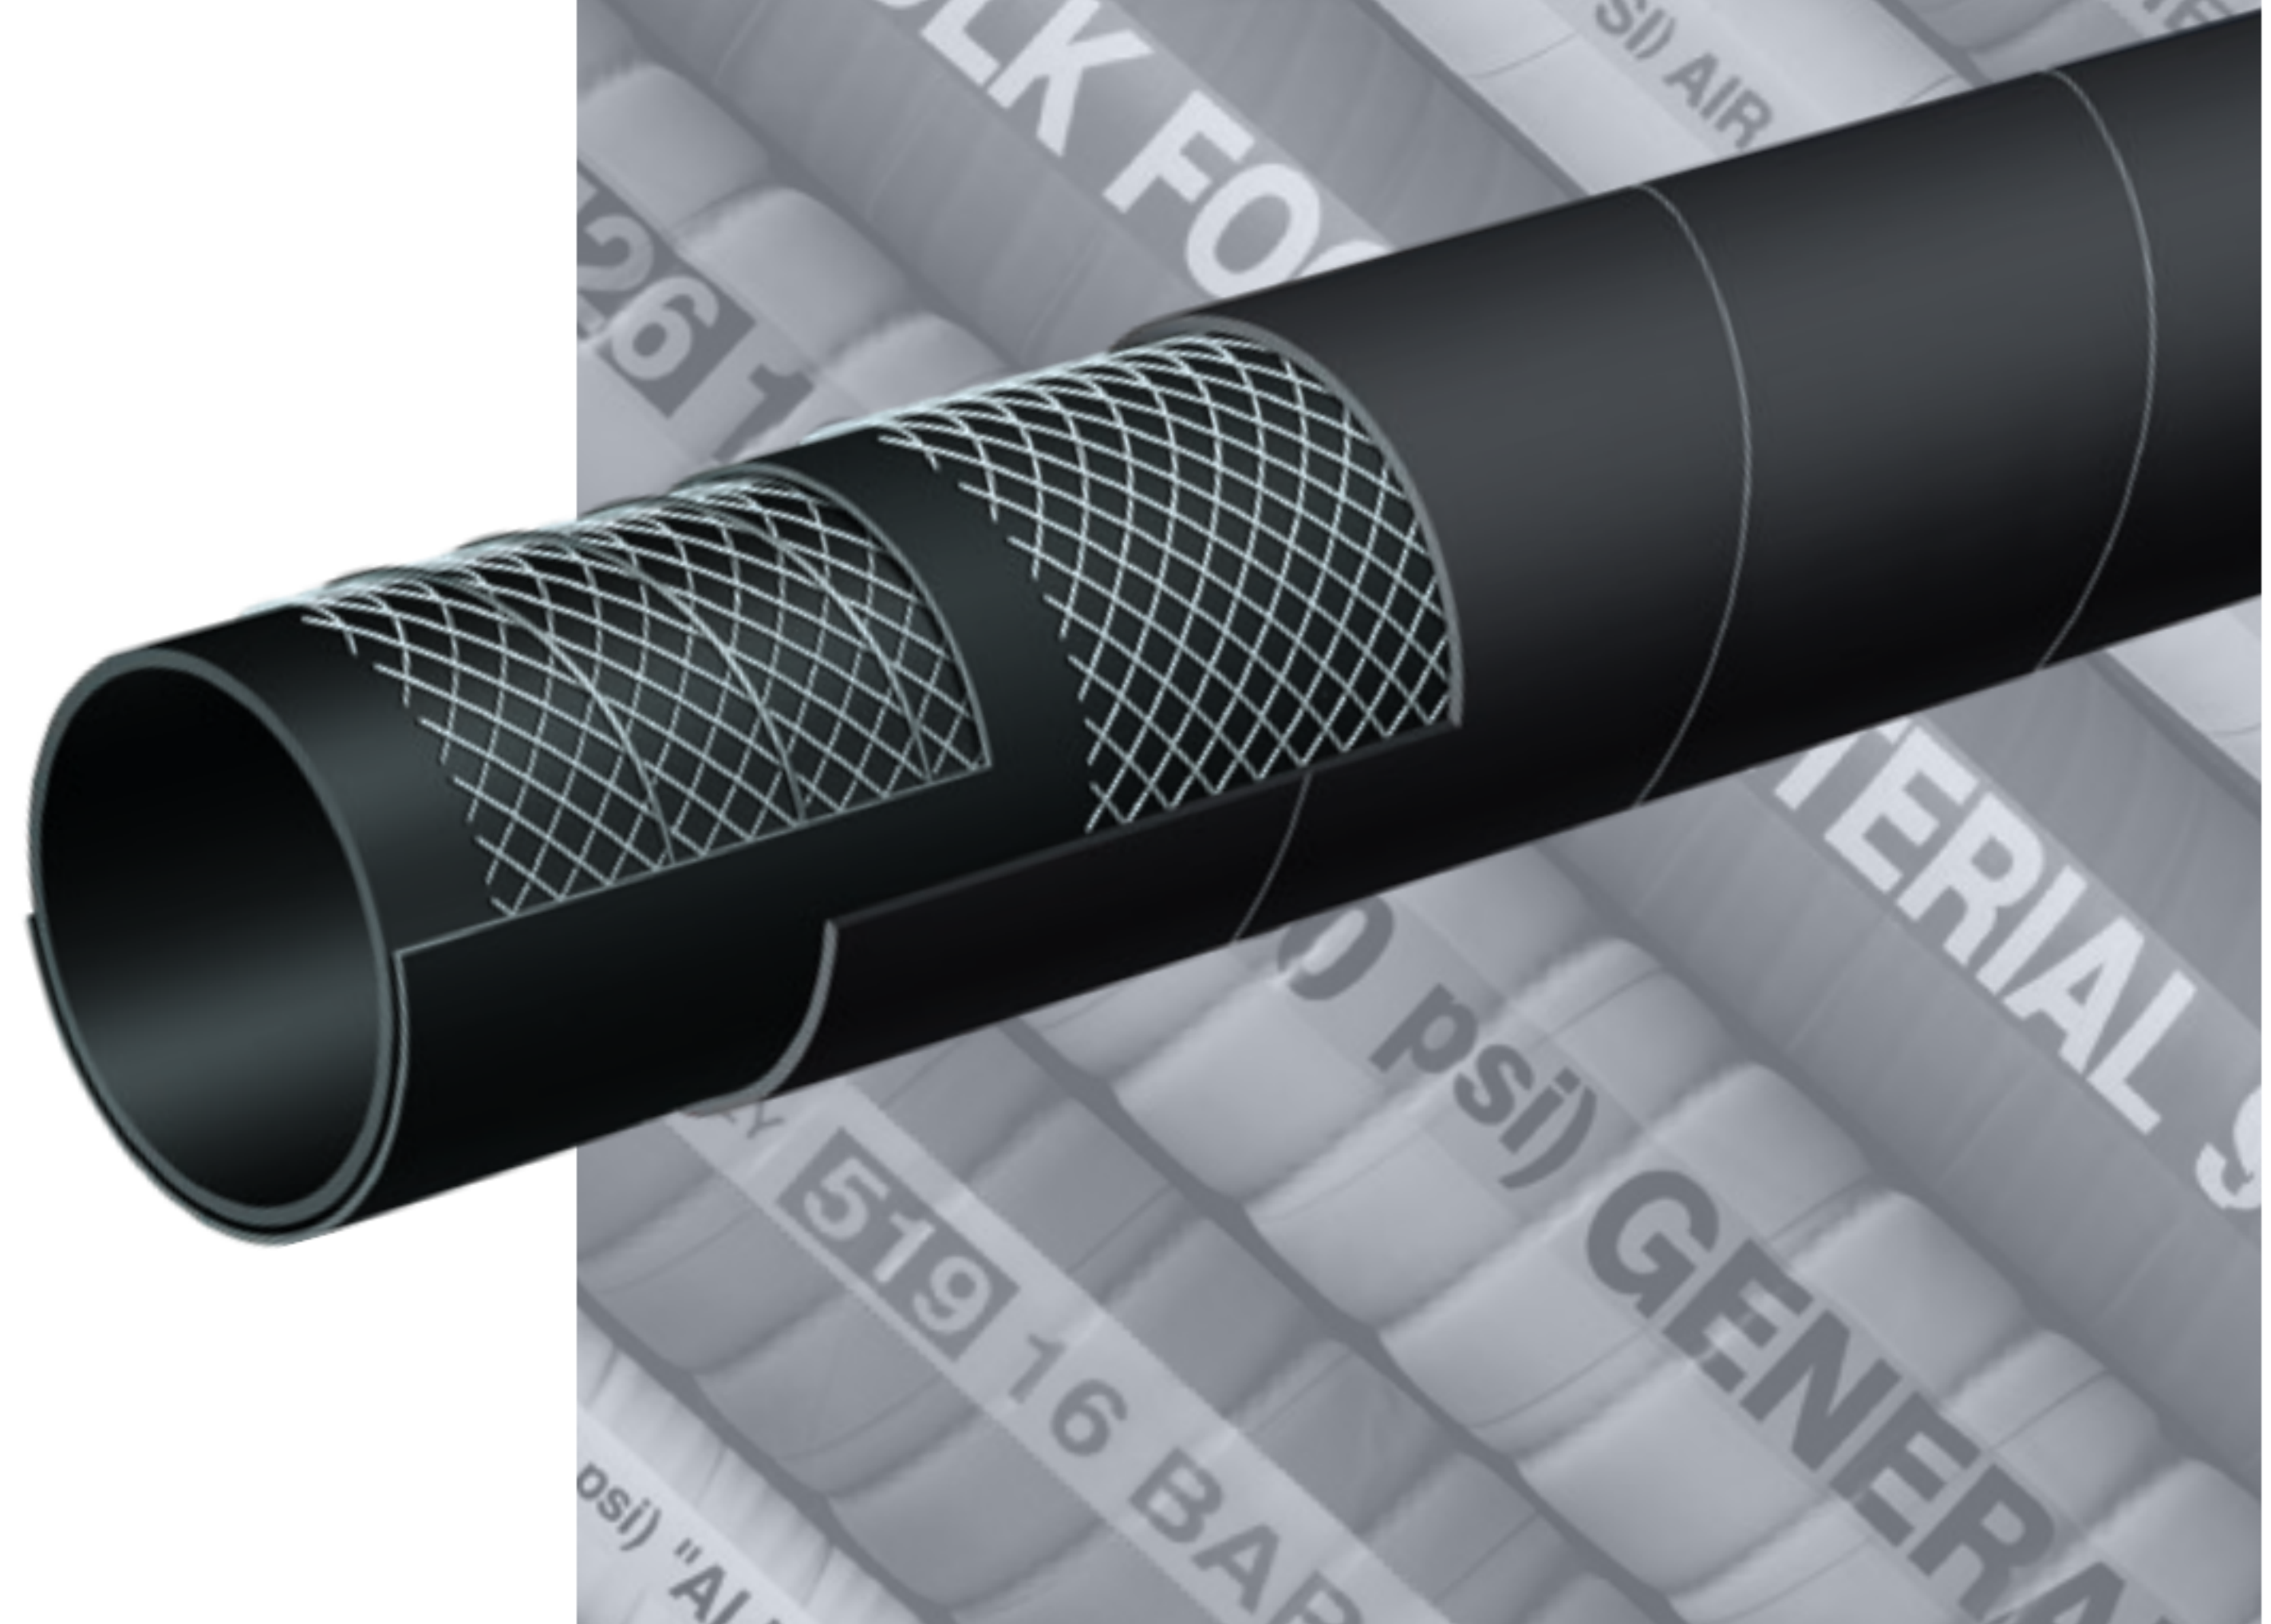

General Applications:

Fuel, oil and hydraulic fluids suction and discharge. Suitable for exhaust gas from water cooled stationary or marine diesel engines. Offers maximum flexibility.

Construction:

Tube: Black NBR – exhaust gas, fuel and fire resistant.

Reinforcement: High tensile textile cords with flexible steel helix wire.

Cover: Black NBR/PVC blend – abrasion, ozone, hydrocarbon and fire resistant.

Working Pressure:

Constant Pressure – 2 Bar (30 PSI)

Service Temperature Range:

-4°F (-20°C) to +212°F (+100°C)

Branding:


ALFAGOMMA – ITALY T600 MARINE EXHAUST/
FUEL S & D – <SIZE> – USCG/SAE J1527 TYPE
A2 (in red letters)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T600AA062	5/8	16	1.02	26	30	30	2	25/50	0.36
T600AA075	3/4	19	1.14	29	30	30	2 1/4	25/50	0.44
T600AA087	7/8	22	1.26	32	30	30	2 3/4	25/50	0.50
T600AA100	1	25	1.38	35	30	30	3	25/50	0.56
T600AA112	1 1/8	28	1.50	38	30	30	3 1/4	25/50	0.60
T600AA125	1 1/4	32	1.65	42	30	30	3 3/4	25/50	0.65
T600AA137	1 3/8	35	1.77	45	30	30	4 1/4	25/50	0.70
T600AA150	1 1/2	38	1.89	48	30	30	4 1/2	25/50	0.76
T600AA162	1 5/8	42	2.17	52	30	30	5	25/50	0.81
T600AA175	1 3/4	45	2.16	55	30	30	5 1/4	25/50	0.87
T600AA189	1 7/8	48	2.28	58	30	30	5 3/4	25/50	0.91
T600AA200	2	51	2.40	61	30	30	6	25/50	0.99
T600AA225	2 1/4	57	2.64	67	30	30	6 3/4	25/50	1.09
T600AA238	2 3/8	60	2.76	70	30	27	7	25/50	1.25
T600AA250	2 1/2	63	2.87	73	30	27	7 1/2	25/50	1.31

continued

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

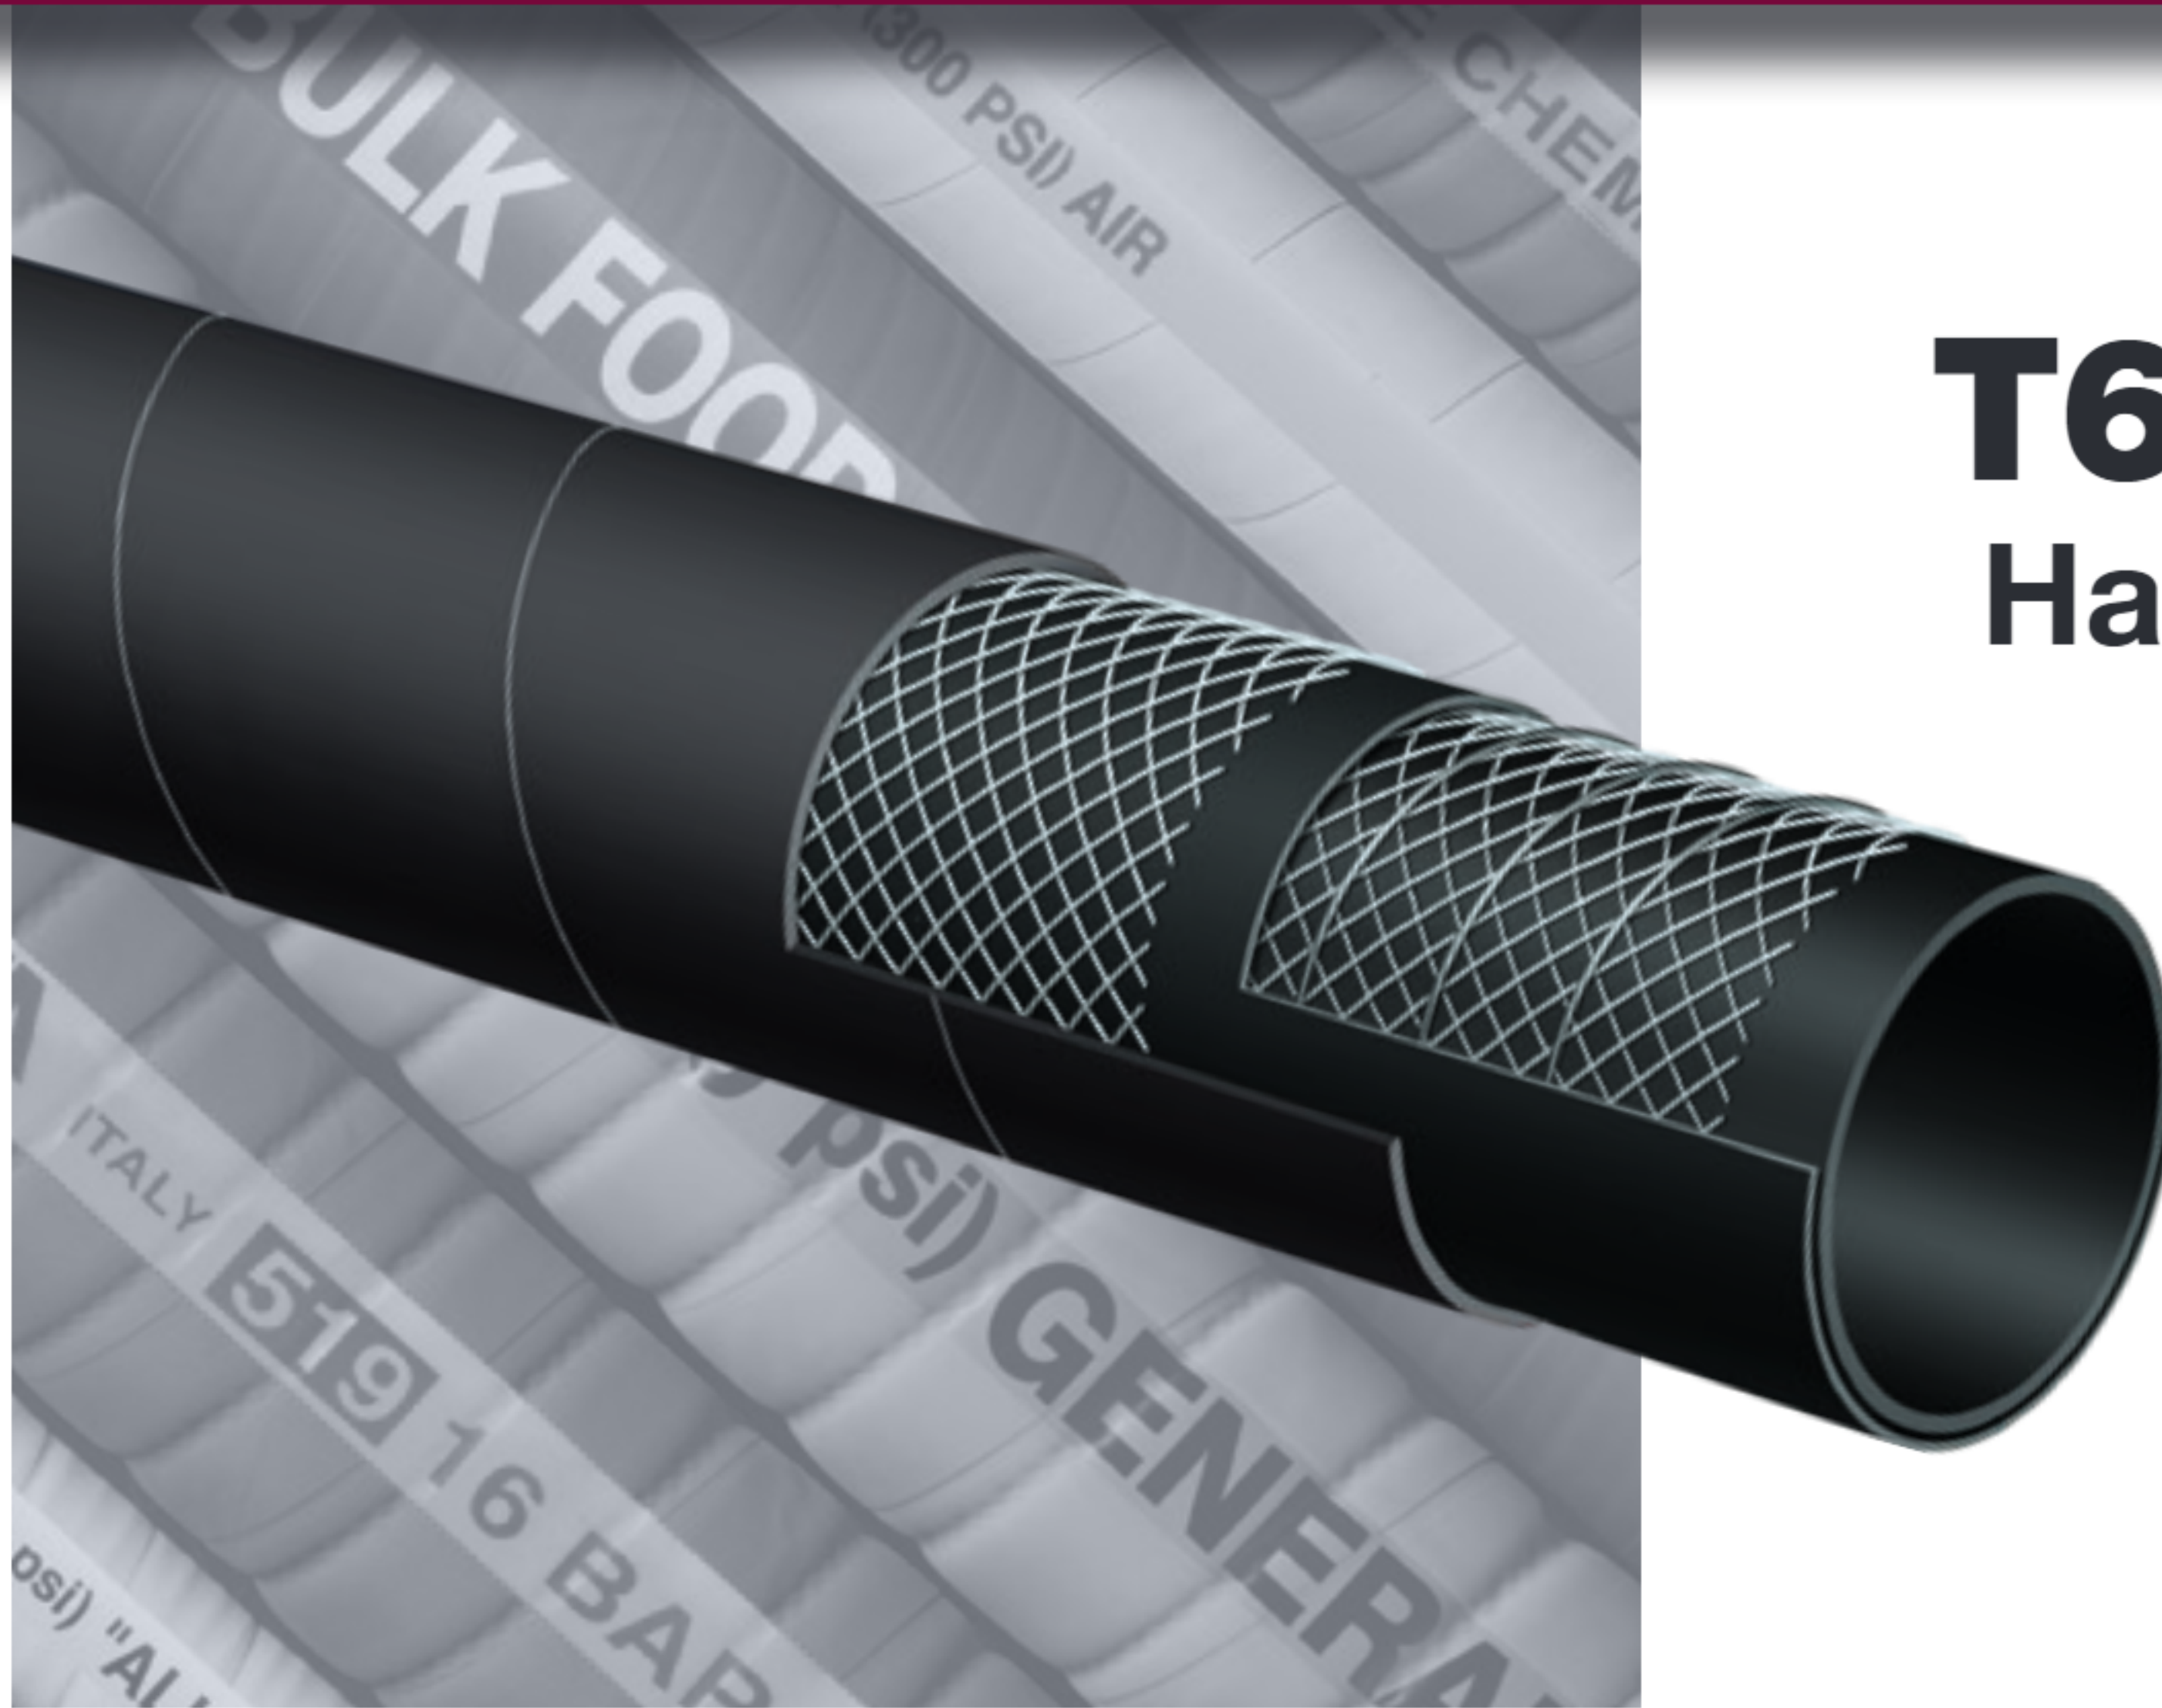

T600AA Series *(continued)* **Hard Wall Marine Exhaust Hose** **USCG/SAE J1527 A2/B2**

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T600AA275	2 3/4	70	3.11	80	30	27	8 1/4	25/50	1.41
T600AA300	3	76	3.39	86	30	27	9	25/50	1.53
T600AA350	3 1/2	90	3.94	100	30	27	10 1/2	25/50	1.91
T600AA400	4	102	4.41	112	30	27	12	25/50	2.12
T600AA450	4 1/2	115	5.00	127	30	27	13 1/2	25/50	2.72
T600AA500	5	127	5.55	141	30	24	15	25/50	3.04

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.