




"COLD-FLEX"  
MATERIALS



TRANSPARENT  
CONSTRUCTION



WATER

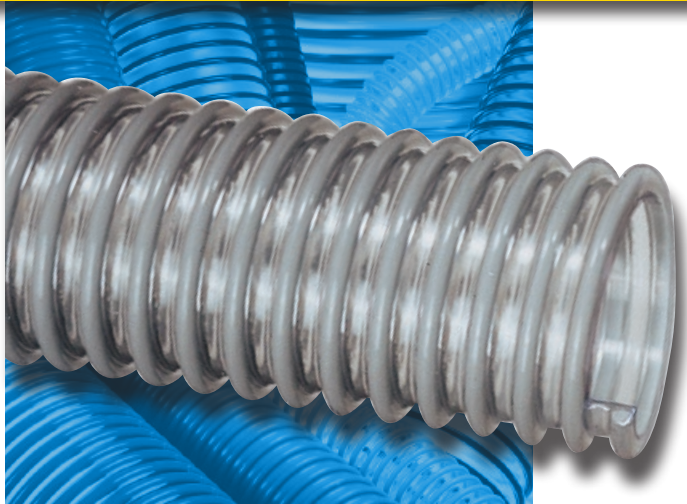

## WH™ Series Standard Duty PVC Liquid Suction Hose

## SH™ Series Standard Duty Low Temperature PVC Liquid Suction Hose

**Our Most  
Flexible Suction  
Hose**



### General Applications:

- Drain lines
- Dust collection
- Gold dredging
- Water suction – standard duty

**Construction:** PVC tube with rigid PVC helix.

**Service Temperature Range (WH Series):**  
-4°F (-20°C) to +150°F (+65°C)\*

**Service Temperature Range (SH Series):**  
-40°F (-40°C) to +150°F (+65°C)\*

### Features and Advantages:

- **"Cold-Flex" Materials (SH Series; Sizes 2½" - 8")** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – "See-the-flow." Allows for visual conformation of material flow.
- **Convoluted Outer Cover** – Provides increased hose flexibility.
- **Phthalate Free**

## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
WH100	1	25.4	1.22	31.0	45	15	Full	24	1	100	0.15
WH125	1-1/4	31.8	1.54	39.2	40	12	Full	24	1	100	0.20
WH150	1-1/2	38.1	1.80	45.7	40	12	Full	24	1.5	100	0.25
WH200	2	50.8	2.32	58.7	35	10	26	20	2.5	100	0.31
SH250	2-1/2	63.5	9.97	75.5	30	9	24	18	3	100	0.43
SH300	3	76.2	3.48	88.4	25	7	24	18	4	100	0.64
SH400	4	101.6	4.52	114.8	25	7	18	14	6	100	1.06
SH500	5	127.0	5.57	141.5	20	6	16	12	10	100	1.47
SH600	6	153.4	6.69	169.9	20	6	14	10	12	100	2.27
SH800	8	204.8	8.86	225.0	10	3	12	8	24	60	3.34

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 63.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(10)</sup>, RoHS<sup>(11)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

