



MULCH

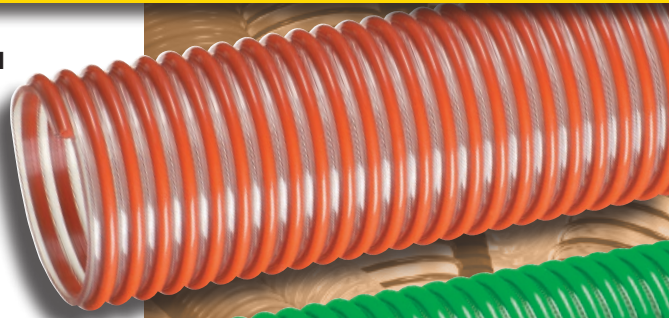

MULCH-LT
(low temp)

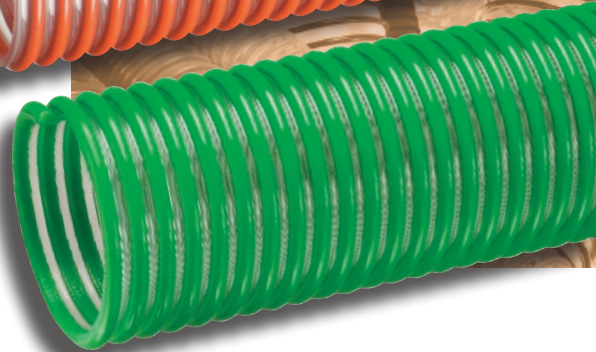

“Mulch Hose”

MULCH™ Series

Heavy Duty PVC
Material Handling Hose

MULCH-LT™ Series

Heavy Duty PVC
Low Temperature
Material Handling Hose

General Applications:

- Material handling – standard duty
- Mulch, bark, wood chips and other surfacing material delivery
- Soil, seed and compost delivery

Construction: PVC tube and rigid PVC helix.

Service Temperature Range (MULCH):
-4°F (-20°C) to +150°F (+65°C)*

Service Temperature Range (MULCH-LT):
-40°F (-40°C) to +150°F (+65°C)*

Features and Advantages:

- **Abrasion Resistant PVC Tube** – Formulated from highly durable PVC compounds for increased abrasion and tear resistance versus standard PVC hoses.
- **“Cold-Flex” Materials (MULCH-LT only)** – Hose remains flexible in sub-zero temperatures.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Phthalate Free**



Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
MULCH400	4	101.6	4.57	116.0	35	15	Full	28	8	100	1.42
MULCH500	5	127.0	5.61	142.6	30	12	24	22	14	100	1.75
MULCH600	6	153.4	6.79	172.4	25	10	24	22	16	100	2.42
MULCH-LT400	4	101.6	4.57	116.0	35	15	Full	28	8	100	1.35

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 63.

*Actual service temperature range is application dependent.

PHthalate FREE⁽¹⁰⁾, RoHS⁽¹¹⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.