


RDA-A

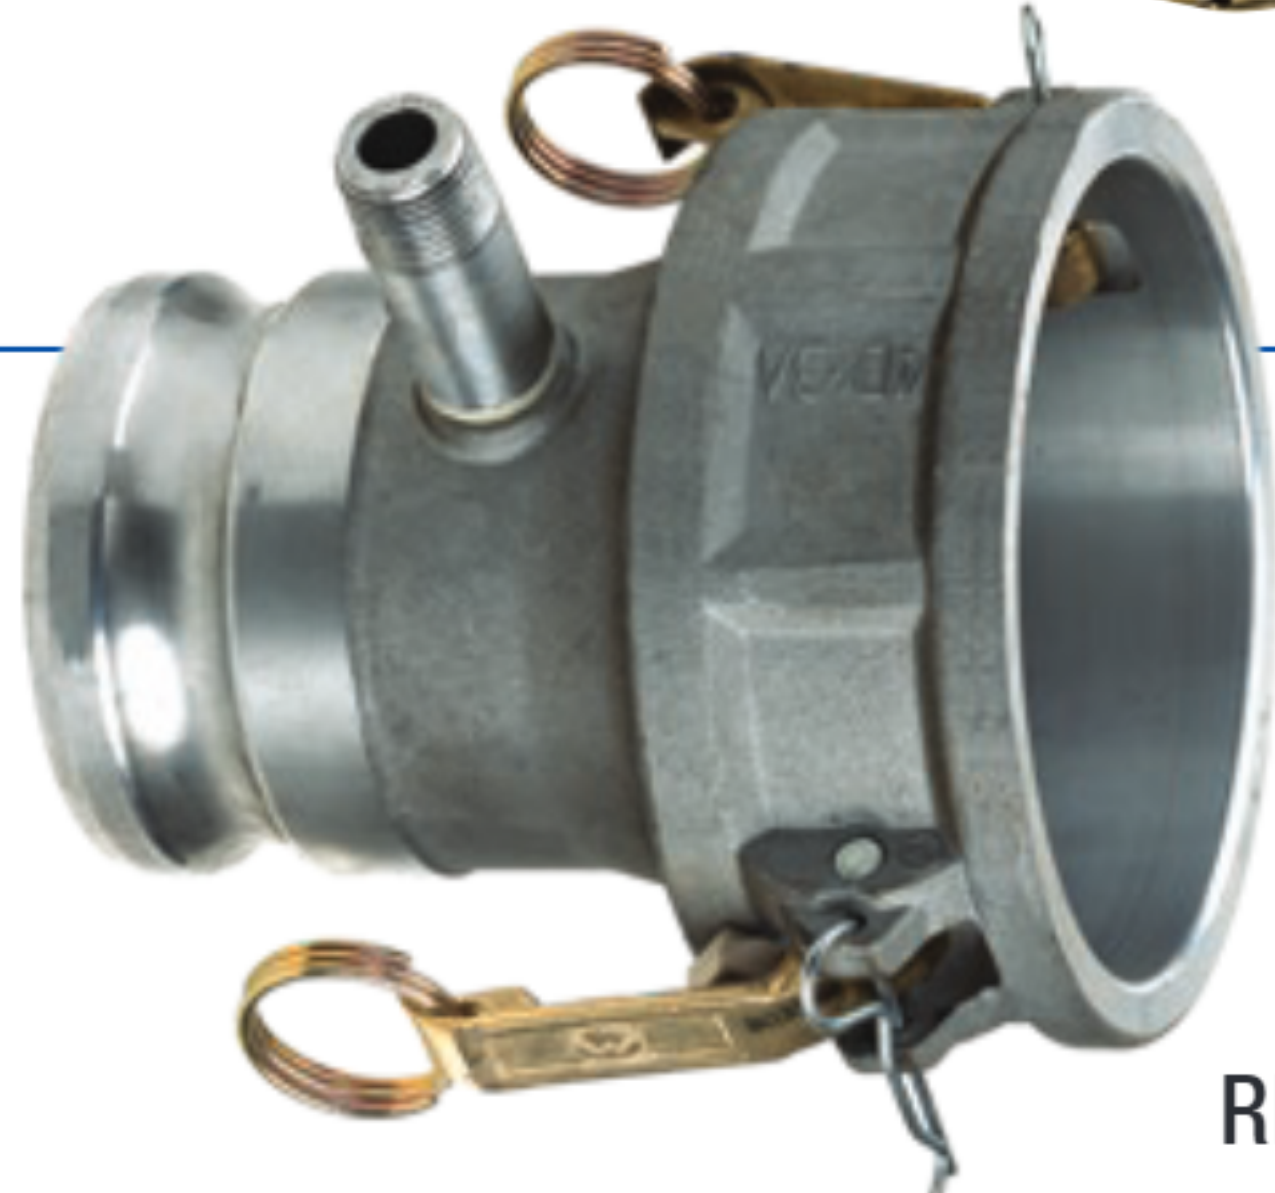

RDA-SPA

RDA-A Series (Aluminum Part D x A)

Female Coupler X Male Coupler

RDA-SPA Series

(Aluminum Part D x A with Pipe Tap)

Female Coupler X Male Coupler with 1/2" Pipe Tap

VIEW ONLINE



SCAN FOR INFO
or visit
KOA.link/RDA-A

GENERAL APPLICATIONS

Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

FEATURES AND ADVANTAGES

- High quality design made to withstand rigorous applications found in industrial markets.
- Aluminum alloy specially designed for high tensile strength and impact resistance.
- Supplied with forged brass handles which results in less wear on connecting parts.

MATERIAL SPECIFICATIONS

- ASTM aluminum alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- Forged brass handles.
- Zinc-plated carbon steel handle pins, pull rings and safety clips.
- Buna-N gasket included.

Part Number	Female Coupler Size (in)	Male Coupler Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
RDA-A2015	2	1 1/2	250	B26 Grade 713	0.99	20
RDA-A2030	2	3	250	B26 Grade 713	1.64	12
RDA-A3020	3	2	150	B108-92 356	2.37	6
RDA-A3040	3	4	150	B108-92 356	2.60	6
RDA-A4020	4	2	150	B26 Grade 713	2.70	6
RDA-A4030	4	3	150	B108-92 356	2.96	6
RDA-A4050	4	5	150	B108-92 356	4.41	4
RDA-A5040	5	4	75	B26 Grade 713	4.07	4
RDA-A6040	6	4	75	B108-92 356	6.66	2
RDA-A8060	8	6	50	B26 Grade 713	10.40	4

Part Number	Female Coupler Size (in)	Male Coupler Size (in)	NPT Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
RDA-SPA4030	4	3	1/2	150	B108-92 356	2.73	6

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.